

DBMS

(Data Base Management System)

PRACTICAL PROGRAMS

Dr. John T Mesia Dhas

Dr. T. S. Shiny Angel

The Palm Series



DBMS

(Data Base Management System)

PRACTICAL

PROGRAMS

Dr. John T Mesia Dhas

Dr. T. S. Shiny Angel

Title: DBMS PRACTICAL PROGRAMS

Author: Dr. John T Mesia Dhas, Dr. T. S. Shiny Angel

Publisher: Self-published by Dr. John T Mesia Dhas

Copyright © 2021 Dr. John T Mesia Dhas

All rights reserved, including the right of reproduction in whole or in part or any form

Address of Publisher: No-1, MGR Street, Charles Nagar, Pattabiram

Chennai – 600072

India

Email: jtmdhasres@gmail.com

Printer: The Palm

Mogappair West

Chennai -600037

India

ISBN: 978-93-5437-572-9

CONTENTS

Chapter	Particulars	Page
1	PL/SQL BASICS	1
2	EXAMPLE QUESTIONS	69
3	PRACTICAL EXERCISES	78
	1. STUDY OF BASIC SQL COMMANDS	79
	2. STUDY OF SPECIAL SQL COMMANDS	90
	3. SQL COMMANDS FOR NESTED QUERIES AND JOIN QUERIES	97
	4. SQL COMMANDS FOR VIEWS	106
	5. CURSOR	109
	6. PROCEDURES	111
	7. FUNCTIONS	113
	8. CONTROLS	115
	9. FRONT END TOOLS	119
	10. FORM DESIGN	123
	11. TRIGGER	126

CHAPTER 1

PL/SQL BASICS

Basic Syntax

In this chapter, we will discuss the Basic Syntax of PL/SQL which is a block-structured language; this means that the PL/SQL programs are divided and written in logical blocks of code. Each block consists of three sub-parts –

S.No	Sections & Description
1	Declarations This section starts with the keyword DECLARE . It is an optional section and defines all variables, cursors, subprograms, and other elements to be used in the program.
2	Executable Commands This section is enclosed between the keywords BEGIN and END and it is a mandatory section. It consists of the executable PL/SQL statements of the program. It should have at least one executable line of code, which may be just a NULL command to indicate that nothing should be executed.
3	Exception Handling This section starts with the keyword EXCEPTION . This optional section contains exception(s) that handle errors in the program.

Every PL/SQL statement ends with a semicolon (;). PL/SQL blocks can be nested within other PL/SQL blocks using **BEGIN** and **END**. Following is the basic structure of a PL/SQL block –

```
DECLARE
  <declarations section>
BEGIN
  <executable command(s)>
EXCEPTION
  <exception handling>
END;
```

The 'Hello World' Example

```
DECLARE
  message varchar2(20):= 'Hello, World!';
BEGIN
  dbms_output.put_line(message);
END;
/
```

The **end;** line signals the end of the PL/SQL block. To run the code from the SQL command line, you may need to type / at the beginning of the first blank line after the last line of the code. When the above code is executed at the SQL prompt, it produces the following result –

```
Hello World
```

PL/SQL procedure successfully completed.

The PL/SQL Identifiers

PL/SQL identifiers are constants, variables, exceptions, procedures, cursors, and reserved words. The identifiers consist of a letter optionally followed by more letters, numerals, dollar signs, underscores, and number signs and should not exceed 30 characters.

By default, **identifiers are not case-sensitive**. So you can use **integer** or **INTEGER** to represent a numeric value. You cannot use a reserved keyword as an identifier.

The PL/SQL Delimiters

A delimiter is a symbol with a special meaning. Following is the list of delimiters in PL/SQL –

Delimiter	Description
+, -, *, /	Addition, subtraction/negation, multiplication, division
%	Attribute indicator
'	Character string delimiter
.	Component selector
(,)	Expression or list delimiter
:	Host variable indicator
,	Item separator
"	Quoted identifier delimiter
=	Relational operator
@	Remote access indicator
;	Statement terminator
:=	Assignment operator
=>	Association operator
	Concatenation operator
**	Exponentiation operator
<<, >>	Label delimiter (begin and end)
/*, */	Multi-line comment delimiter (begin and end)
--	Single-line comment indicator
..	Range operator

<, >, <=, >=	Relational operators
<>, !=, ~=, ^=	Different versions of NOT EQUAL

The PL/SQL Comments

Program comments are explanatory statements that can be included in the PL/SQL code that you write and helps anyone reading its source code. All programming languages allow some form of comments.

The PL/SQL supports single-line and multi-line comments. All characters available inside any comment are ignored by the PL/SQL compiler. The PL/SQL single-line comments start with the delimiter -- (double hyphen) and multi-line comments are enclosed by /* and */.

```

DECLARE
  -- variable declaration
  message varchar2(20):= 'Hello, World!';
BEGIN
  /*
  * PL/SQL executable statement(s)
  */
  dbms_output.put_line(message);
END;
/

```

When the above code is executed at the SQL prompt, it produces the following result –

```
Hello World
```

```
PL/SQL procedure successfully completed.
```

PL/SQL Program Units

A PL/SQL unit is any one of the following –

- PL/SQL block
- Function
- Package
- Package body
- Procedure
- Trigger
- Type
- Type body

Each of these units will be discussed in the following chapters.

PL/SQL - Data Types

In this chapter, we will discuss the Data Types in PL/SQL. The PL/SQL variables, constants and parameters must have a valid data type, which specifies a storage format, constraints, and a valid range of values. We will focus on the **SCALAR** and the **LOB** data types in this chapter. The other two data types will be covered in other chapters.

S.No	Category & Description
1	Scalar Single values with no internal components, such as a NUMBER ,

	DATE, or BOOLEAN.
2	Large Object (LOB) Pointers to large objects that are stored separately from other data items, such as text, graphic images, video clips, and sound waveforms.
3	Composite Data items that have internal components that can be accessed individually. For example, collections and records.
4	Reference Pointers to other data items.

PL/SQL Scalar Data Types and Subtypes

PL/SQL Scalar Data Types and Subtypes come under the following categories –

S.No	Date Type & Description
1	Numeric Numeric values on which arithmetic operations are performed.
2	Character Alphanumeric values that represent single characters or strings of characters.
3	Boolean Logical values on which logical operations are performed.
4	Datetime Dates and times.

PL/SQL provides subtypes of data types. For example, the data type NUMBER has a subtype called INTEGER. You can use the subtypes in your PL/SQL program to make the data types compatible with data types in other programs while embedding the PL/SQL code in another program, such as a Java program.

PL/SQL Numeric Data Types and Subtypes

Following table lists out the PL/SQL pre-defined numeric data types and their sub-types –

S.No	Data Type & Description
1	PLS_INTEGER Signed integer in range -2,147,483,648 through 2,147,483,647, represented in 32 bits
2	BINARY_INTEGER Signed integer in range -2,147,483,648 through 2,147,483,647, represented in 32 bits
3	BINARY_FLOAT Single-precision IEEE 754-format floating-point number

4	BINARY_DOUBLE Double-precision IEEE 754-format floating-point number
5	NUMBER(prec, scale) Fixed-point or floating-point number with absolute value in range 1E-130 to (but not including) 1.0E126. A NUMBER variable can also represent 0
6	DEC(prec, scale) ANSI specific fixed-point type with maximum precision of 38 decimal digits
7	DECIMAL(prec, scale) IBM specific fixed-point type with maximum precision of 38 decimal digits
8	NUMERIC(pre, scale) Floating type with maximum precision of 38 decimal digits
9	DOUBLE PRECISION ANSI specific floating-point type with maximum precision of 126 binary digits (approximately 38 decimal digits)
10	FLOAT ANSI and IBM specific floating-point type with maximum precision of 126 binary digits (approximately 38 decimal digits)
11	INT ANSI specific integer type with maximum precision of 38 decimal digits
12	INTEGER ANSI and IBM specific integer type with maximum precision of 38 decimal digits
13	SMALLINT ANSI and IBM specific integer type with maximum precision of 38 decimal digits
14	REAL Floating-point type with maximum precision of 63 binary digits (approximately 18 decimal digits)

Following is a valid declaration –

```

DECLARE
  num1 INTEGER;
  num2 REAL;
  num3 DOUBLE PRECISION;
BEGIN
  null;
END;
/

```

When the above code is compiled and executed, it produces the following result –

```

PL/SQL procedure successfully completed

```

PL/SQL Character Data Types and Subtypes

Following is the detail of PL/SQL pre-defined character data types and their sub-types –

S.No	Data Type & Description
1	CHAR Fixed-length character string with maximum size of 32,767 bytes
2	VARCHAR2 Variable-length character string with maximum size of 32,767 bytes
3	RAW Variable-length binary or byte string with maximum size of 32,767 bytes, not interpreted by PL/SQL
4	NCHAR Fixed-length national character string with maximum size of 32,767 bytes
5	NVARCHAR2 Variable-length national character string with maximum size of 32,767 bytes
6	LONG Variable-length character string with maximum size of 32,760 bytes
7	LONG RAW Variable-length binary or byte string with maximum size of 32,760 bytes, not interpreted by PL/SQL
8	ROWID Physical row identifier, the address of a row in an ordinary table
9	UROWID Universal row identifier (physical, logical, or foreign row identifier)

PL/SQL Boolean Data Types

The **BOOLEAN** data type stores logical values that are used in logical operations. The logical values are the Boolean values **TRUE** and **FALSE** and the value **NULL**.

However, SQL has no data type equivalent to **BOOLEAN**. Therefore, Boolean values cannot be used in –

- SQL statements
- Built-in SQL functions (such as **TO_CHAR**)
- PL/SQL functions invoked from SQL statements

PL/SQL Datetime and Interval Types

The **DATE** datatype is used to store fixed-length datetimes, which include the time of day in seconds since midnight. Valid dates range from January 1, 4712 BC to December 31, 9999 AD.

The default date format is set by the Oracle initialization parameter **NLS_DATE_FORMAT**. For example, the default might be 'DD-MON-YY', which includes a two-digit number for the day of the month, an abbreviation of the month name, and the last two digits of the year. For example, 01-OCT-12.

Each DATE includes the century, year, month, day, hour, minute, and second. The following table shows the valid values for each field –

Field Name	Valid Datetime Values	Valid Values	Interval
YEAR	-4712 to 9999 (excluding year 0)	Any nonzero integer	
MONTH	01 to 12	0 to 11	
DAY	01 to 31 (limited by the values of MONTH and YEAR, according to the rules of the calendar for the locale)	Any nonzero integer	
HOUR	00 to 23	0 to 23	
MINUTE	00 to 59	0 to 59	
SECOND	00 to 59.9(n), where 9(n) is the precision of time fractional seconds	0 to 59.9(n), where 9(n) is the precision of interval fractional seconds	
TIMEZONE_HOUR	-12 to 14 (range accommodates daylight savings time changes)	Not applicable	
TIMEZONE_MINUTE	00 to 59	Not applicable	
TIMEZONE_REGION	Found in the dynamic performance view V\$TIMEZONE_NAMES	Not applicable	
TIMEZONE_ABBR	Found in the dynamic performance view V\$TIMEZONE_NAMES	Not applicable	

PL/SQL Large Object (LOB) Data Types

Large Object (LOB) data types refer to large data items such as text, graphic images, video clips, and sound waveforms. LOB data types allow efficient, random, piecewise access to this data. Following are the predefined PL/SQL LOB data types –

Data Type	Description	Size
BFILE	Used to store large binary objects in operating system files outside the database.	System-dependent. Cannot exceed 4 gigabytes (GB).
BLOB	Used to store large binary objects in the database.	8 to 128 terabytes (TB)
CLOB	Used to store large blocks of character data in the database.	8 to 128 TB

NCLOB	Used to store large blocks of NCHAR data in the database.	8 to 128 TB
-------	---	-------------

PL/SQL User-Defined Subtypes

A subtype is a subset of another data type, which is called its base type. A subtype has the same valid operations as its base type, but only a subset of its valid values.

PL/SQL predefines several subtypes in package **STANDARD**. For example, PL/SQL predefines the subtypes **CHARACTER** and **INTEGER** as follows –

```
SUBTYPE CHARACTER IS CHAR;
SUBTYPE INTEGER IS NUMBER(38,0);
```

You can define and use your own subtypes. The following program illustrates defining and using a user-defined subtype –

```
DECLARE
  SUBTYPE name IS char(20);
  SUBTYPE message IS varchar2(100);
  salutation name;
  greetings message;
BEGIN
  salutation := 'Reader ';
  greetings := 'Welcome to the World of PL/SQL';
  dbms_output.put_line('Hello ' || salutation || greetings);
END;
/
```

When the above code is executed at the SQL prompt, it produces the following result –

```
Hello Reader Welcome to the World of PL/SQL
```

```
PL/SQL procedure successfully completed.
```

NULLs in PL/SQL

PL/SQL NULL values represent **missing** or **unknown data** and they are not an integer, a character, or any other specific data type. Note that **NULL** is not the same as an empty data string or the null character value '\0'. A null can be assigned but it cannot be equated with anything, including itself.

PL/SQL - Variables

In this chapter, we will discuss Variables in PL/SQL. A variable is nothing but a name given to a storage area that our programs can manipulate. Each variable in PL/SQL has a specific data type, which determines the size and the layout of the variable's memory; the range of values that can be stored within that memory and the set of operations that can be applied to the variable.

The name of a PL/SQL variable consists of a letter optionally followed by more letters, numerals, dollar signs, underscores, and number signs and should not exceed 30 characters. By default, variable names are not case-sensitive. You cannot use a reserved PL/SQL keyword as a variable name.

PL/SQL programming language allows to define various types of variables, such as date time data types, records, collections, etc. which we will cover in subsequent chapters. For this chapter, let us study only basic variable types.

Variable Declaration in PL/SQL

PL/SQL variables must be declared in the declaration section or in a package as a global variable. When you declare a variable, PL/SQL allocates memory for the variable's value and the storage location is identified by the variable name.

The syntax for declaring a variable is –

```
variable_name [CONSTANT] datatype [NOT NULL] [:= | DEFAULT initial_value]
```

Where, *variable_name* is a valid identifier in PL/SQL, *datatype* must be a valid PL/SQL data type or any user defined data type which we already have discussed in the last chapter. Some valid variable declarations along with their definition are shown below –

```
sales number(10, 2);
pi CONSTANT double precision := 3.1415;
name varchar2(25);
address varchar2(100);
```

When you provide a size, scale or precision limit with the data type, it is called a **constrained declaration**. Constrained declarations require less memory than unconstrained declarations. For example –

```
sales number(10, 2);
name varchar2(25);
address varchar2(100);
```

Initializing Variables in PL/SQL

Whenever you declare a variable, PL/SQL assigns it a default value of NULL. If you want to initialize a variable with a value other than the NULL value, you can do so during the declaration, using either of the following –

- The **DEFAULT** keyword
- The **assignment** operator

For example –

```
counter binary_integer := 0;
greetings varchar2(20) DEFAULT 'Have a Good Day';
```

You can also specify that a variable should not have a **NULL** value using the **NOT NULL** constraint. If you use the NOT NULL constraint, you must explicitly assign an initial value for that variable.

It is a good programming practice to initialize variables properly otherwise, sometimes programs would produce unexpected results. Try the following example which makes use of various types of variables –

```
DECLARE
  a integer := 10;
  b integer := 20;
  c integer;
  f real;
BEGIN
  c := a + b;
  dbms_output.put_line('Value of c: ' || c);
  f := 70.0/3.0;
  dbms_output.put_line('Value of f: ' || f);
END;
```

```
/
```

When the above code is executed, it produces the following result –

```
Value of c: 30  
Value of f: 23.333333333333333333
```

PL/SQL procedure successfully completed.

Variable Scope in PL/SQL

PL/SQL allows the nesting of blocks, i.e., each program block may contain another inner block. If a variable is declared within an inner block, it is not accessible to the outer block. However, if a variable is declared and accessible to an outer block, it is also accessible to all nested inner blocks. There are two types of variable scope –

- **Local variables** – Variables declared in an inner block and not accessible to outer blocks.
- **Global variables** – Variables declared in the outermost block or a package.

Following example shows the usage of **Local** and **Global** variables in its simple form –

```
DECLARE  
  -- Global variables  
  num1 number := 95;  
  num2 number := 85;  
BEGIN  
  dbms_output.put_line('Outer Variable num1: ' || num1);  
  dbms_output.put_line('Outer Variable num2: ' || num2);  
  DECLARE  
    -- Local variables  
    num1 number := 195;  
    num2 number := 185;  
  BEGIN  
    dbms_output.put_line('Inner Variable num1: ' || num1);  
    dbms_output.put_line('Inner Variable num2: ' || num2);  
  END;  
END;  
/
```

When the above code is executed, it produces the following result –

```
Outer Variable num1: 95  
Outer Variable num2: 85  
Inner Variable num1: 195  
Inner Variable num2: 185
```

PL/SQL procedure successfully completed.

Assigning SQL Query Results to PL/SQL Variables

You can use the **SELECT INTO** statement of SQL to assign values to PL/SQL variables. For each item in the **SELECT list**, there must be a corresponding, type-compatible variable in the **INTO list**. The following example illustrates the concept. Let us create a table named CUSTOMERS –

(For SQL statements, please refer to the [SQL tutorial](#))

```
CREATE TABLE CUSTOMERS(  
  ID INT NOT NULL,
```

```
NAME VARCHAR (20) NOT NULL,  
AGE INT NOT NULL,  
ADDRESS CHAR (25),  
SALARY DECIMAL (18, 2),  
PRIMARY KEY (ID)  
);
```

Table Created

Let us now insert some values in the table –

```
INSERT INTO CUSTOMERS (ID,NAME,AGE,ADDRESS,SALARY)  
VALUES (1, 'Ramesh', 32, 'Ahmedabad', 2000.00 );
```

```
INSERT INTO CUSTOMERS (ID,NAME,AGE,ADDRESS,SALARY)  
VALUES (2, 'Khilan', 25, 'Delhi', 1500.00 );
```

```
INSERT INTO CUSTOMERS (ID,NAME,AGE,ADDRESS,SALARY)  
VALUES (3, 'kaushik', 23, 'Kota', 2000.00 );
```

```
INSERT INTO CUSTOMERS (ID,NAME,AGE,ADDRESS,SALARY)  
VALUES (4, 'Chaitali', 25, 'Mumbai', 6500.00 );
```

```
INSERT INTO CUSTOMERS (ID,NAME,AGE,ADDRESS,SALARY)  
VALUES (5, 'Hardik', 27, 'Bhopal', 8500.00 );
```

```
INSERT INTO CUSTOMERS (ID,NAME,AGE,ADDRESS,SALARY)  
VALUES (6, 'Komal', 22, 'MP', 4500.00 );
```

The following program assigns values from the above table to PL/SQL variables using the **SELECT INTO clause** of SQL –

```
DECLARE  
  c_id customers.id%type := 1;  
  c_name customers.name%type;  
  c_addr customers.address%type;  
  c_sal customers.salary%type;  
BEGIN  
  SELECT name, address, salary INTO c_name, c_addr, c_sal  
  FROM customers  
  WHERE id = c_id;  
  dbms_output.put_line  
  ('Customer ' ||c_name || ' from ' || c_addr || ' earns ' || c_sal);  
END;  
/
```

When the above code is executed, it produces the following result –

```
Customer Ramesh from Ahmedabad earns 2000
```

```
PL/SQL procedure completed successfully
```

PL/SQL - Constants and Literals

In this chapter, we will discuss **constants** and **literals** in PL/SQL. A constant holds a value that once declared, does not change in the program. A constant declaration specifies its name, data type, and value, and allocates storage for it. The declaration can also impose the **NOT NULL constraint**.

Declaring a Constant

A constant is declared using the **CONSTANT** keyword. It requires an initial value and does not allow that value to be changed. For example –

```
PI CONSTANT NUMBER := 3.141592654;
DECLARE
  -- constant declaration
  pi constant number := 3.141592654;
  -- other declarations
  radius number(5,2);
  dia number(5,2);
  circumference number(7, 2);
  area number (10, 2);
BEGIN
  -- processing
  radius := 9.5;
  dia := radius * 2;
  circumference := 2.0 * pi * radius;
  area := pi * radius * radius;
  -- output
  dbms_output.put_line('Radius: ' || radius);
  dbms_output.put_line('Diameter: ' || dia);
  dbms_output.put_line('Circumference: ' || circumference);
  dbms_output.put_line('Area: ' || area);
END;
/
```

When the above code is executed at the SQL prompt, it produces the following result –

```
Radius: 9.5
Diameter: 19
Circumference: 59.69
Area: 283.53
```

PL/SQL procedure successfully completed.

The PL/SQL Literals

A literal is an explicit numeric, character, string, or Boolean value not represented by an identifier. For example, TRUE, 786, NULL, 'tutorialspoint' are all literals of type Boolean, number, or string. PL/SQL, literals are case-sensitive. PL/SQL supports the following kinds of literals –

- Numeric Literals
- Character Literals
- String Literals
- BOOLEAN Literals
- Date and Time Literals

The following table provides examples from all these categories of literal values.

S.No	Literal Type & Example
1	Numeric Literals 050 78 -14 0 +32767 6.6667 0.0 -12.0 3.14159 +7800.00 6E5 1.0E-8 3.14159e0 -1E38 -9.5e-3
2	Character Literals 'A' '%' '9' ' ' 'z' '('
3	String Literals 'Hello, world!' 'Tutorials Point' '19-NOV-12'
4	BOOLEAN Literals TRUE, FALSE, and NULL.
5	Date and Time Literals DATE '1978-12-25'; TIMESTAMP '2012-10-29 12:01:01';

To embed single quotes within a string literal, place two single quotes next to each other as shown in the following program –

```

DECLARE
  message varchar2(30):= 'That"s tutorialspoint.com!';
BEGIN
  dbms_output.put_line(message);
END;
/

```

When the above code is executed at the SQL prompt, it produces the following result –

```
That's tutorialspoint.com!
```

```
PL/SQL procedure successfully completed.
```

PL/SQL - Operators

In this chapter, we will discuss operators in PL/SQL. An operator is a symbol that tells the compiler to perform specific mathematical or logical manipulation. PL/SQL language is rich in built-in operators and provides the following types of operators –

- Arithmetic operators
- Relational operators
- Comparison operators
- Logical operators
- String operators

Here, we will understand the arithmetic, relational, comparison and logical operators one by one. The String operators will be discussed in a later chapter – **PL/SQL - Strings**.

Arithmetic Operators

Following table shows all the arithmetic operators supported by PL/SQL. Let us assume **variable A** holds 10 and **variable B** holds 5, then –

Show Examples

Operator	Description	Example
+	Adds two operands	A + B will give 15
-	Subtracts second operand from the first	A - B will give 5
*	Multiplies both operands	A * B will give 50
/	Divides numerator by de-numerator	A / B will give 2
**	Exponentiation operator, raises one operand to the power of other	A ** B will give 100000

Relational Operators

Relational operators compare two expressions or values and return a Boolean result. Following table shows all the relational operators supported by PL/SQL. Let us assume **variable A** holds 10 and **variable B** holds 20, then –

Show Examples

Operator	Description	Example
=	Checks if the values of two operands are equal or not, if yes then condition becomes true.	(A = B) is not true.
!= <> ~=	Checks if the values of two operands are equal or not, if values are not equal then condition becomes true.	(A != B) is true.
>	Checks if the value of left operand is greater than the value of right operand, if yes then condition becomes true.	(A > B) is not true.
<	Checks if the value of left operand is less than the value of right operand, if yes then condition becomes true.	(A < B) is true.
>=	Checks if the value of left operand is greater than or equal to the value of right operand, if yes then condition becomes true.	(A >= B) is not true.
<=	Checks if the value of left operand is less than or equal to the value of right operand, if yes then condition becomes true.	(A <= B) is true

Comparison Operators

Comparison operators are used for comparing one expression to another. The result is always either **TRUE**, **FALSE** or **NULL**.

Show Examples

Operator	Description	Example
LIKE	The LIKE operator compares a character, string, or CLOB value to a pattern and returns TRUE if the value matches the pattern and FALSE if it does not.	If 'Zara Ali' like 'Z% A_i' returns a Boolean true, whereas, 'Nuha Ali' like 'Z% A_i' returns a Boolean false.
BETWEEN	The BETWEEN operator tests whether a value lies in a specified range. x BETWEEN a AND b means that x >= a and x <= b.	If x = 10 then, x between 5 and 20 returns true, x between 5 and 10 returns true, but x between 11 and 20 returns false.
IN	The IN operator tests set membership. x IN (set) means that x is equal to any member of set.	If x = 'm' then, x in ('a', 'b', 'c') returns Boolean false but x in ('m', 'n', 'o') returns Boolean true.
IS NULL	The IS NULL operator returns the BOOLEAN value TRUE if its operand is NULL or FALSE if it is not NULL. Comparisons involving NULL values always yield NULL.	If x = 'm', then 'x is null' returns Boolean false.

Logical Operators

Following table shows the Logical operators supported by PL/SQL. All these operators work on Boolean operands and produce Boolean results. Let us assume **variable A** holds true and **variable B** holds false, then –

Show Examples

Operator	Description	Examples
and	Called the logical AND operator. If both the operands are true then condition becomes true.	(A and B) is false.
or	Called the logical OR Operator. If any of the two operands is true then condition becomes true.	(A or B) is true.
not	Called the logical NOT Operator. Used to reverse the logical state of its operand. If a condition is true then Logical NOT operator will make it false.	not (A and B) is true.

PL/SQL Operator Precedence

Operator precedence determines the grouping of terms in an expression. This affects how an expression is evaluated. Certain operators have higher precedence than others; for example, the multiplication operator has higher precedence than the addition operator.

For example, $x = 7 + 3 * 2$; here, **x** is assigned **13**, not 20 because operator * has higher precedence than +, so it first gets multiplied with **3*2** and then adds into **7**.

Here, operators with the highest precedence appear at the top of the table, those with the lowest appear at the bottom. Within an expression, higher precedence operators will be evaluated first. The precedence of operators goes as follows: =, <, >, <=, >=, <>, !=, ~=, ^=, IS NULL, LIKE, BETWEEN, IN.

[Show Examples](#)

Operator	Operation
**	exponentiation
+, -	identity, negation
*, /	multiplication, division
+, -,	addition, subtraction, concatenation
comparison	
NOT	logical negation
AND	conjunction
OR	inclusion

PL/SQL - Conditions

In this chapter, we will discuss conditions in PL/SQL. Decision-making structures require that the programmer specify one or more conditions to be evaluated or tested by the program, along with a statement or statements to be executed if the condition is determined to be true, and optionally, other statements to be executed if the condition is determined to be false.

Following is the general form of a typical conditional (i.e., decision making) structure found in most of the programming languages –

PL/SQL programming language provides following types of decision-making statements. Click the following links to check their detail.

S.No	Statement & Description
1	<p>IF - THEN statement</p> <p>The IF statement associates a condition with a sequence of statements enclosed by the keywords THEN and END IF. If the condition is true, the statements get executed and if the condition is false or NULL then the IF statement does nothing.</p>
2	<p>IF-THEN-ELSE statement</p> <p>IF statement adds the keyword ELSE followed by an alternative sequence of statement. If the condition is false or NULL, then only the alternative sequence of statements get executed. It ensures that either of the sequence of statements is executed.</p>
3	<p>IF-THEN-ELSIF statement</p> <p>It allows you to choose between several alternatives.</p>


4	<p>Case statement Like the IF statement, the CASE statement selects one sequence of statements to execute. However, to select the sequence, the CASE statement uses a selector rather than multiple Boolean expressions. A selector is an expression whose value is used to select one of several alternatives.</p>
5	<p>Searched CASE statement The searched CASE statement has no selector, and its WHEN clauses contain search conditions that yield Boolean values.</p>
6	<p>nested IF-THEN-ELSE You can use one IF-THEN or IF-THEN-ELSIF statement inside another IF-THEN or IF-THEN-ELSIF statement(s).</p>

PL/SQL - Loops

In this chapter, we will discuss Loops in PL/SQL. There may be a situation when you need to execute a block of code several number of times. In general, statements are executed sequentially: The first statement in a function is executed first, followed by the second, and so on.

Programming languages provide various control structures that allow for more complicated execution paths.

A loop statement allows us to execute a statement or group of statements multiple times and following is the general form of a loop statement in most of the programming languages –

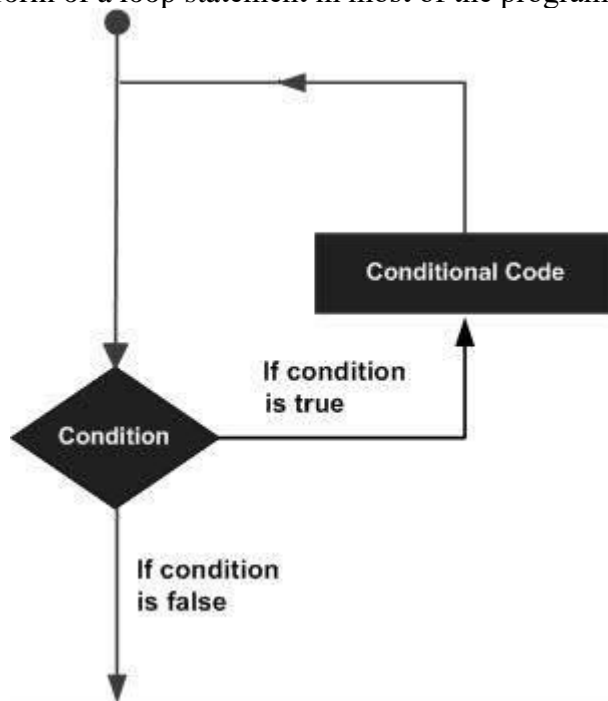

PL/SQL provides the following types of loop to handle the looping requirements. Click the following links to check their detail.

S.No	Loop Type & Description
1	<p><u>PL/SQL Basic LOOP</u> In this loop structure, sequence of statements is enclosed between the LOOP and</p>

	the END LOOP statements. At each iteration, the sequence of statements is executed and then control resumes at the top of the loop.
2	<u>PL/SQL WHILE LOOP</u> Repeats a statement or group of statements while a given condition is true. It tests the condition before executing the loop body.
3	<u>PL/SQL FOR LOOP</u> Execute a sequence of statements multiple times and abbreviates the code that manages the loop variable.
4	<u>Nested loops in PL/SQL</u> You can use one or more loop inside any another basic loop, while, or for loop.

Labeling a PL/SQL Loop

PL/SQL loops can be labeled. The label should be enclosed by double angle brackets (<< and >>) and appear at the beginning of the LOOP statement. The label name can also appear at the end of the LOOP statement. You may use the label in the EXIT statement to exit from the loop.

The following program illustrates the concept –

```

DECLARE
  i number(1);
  j number(1);
BEGIN
  << outer_loop >>
  FOR i IN 1..3 LOOP
    << inner_loop >>
    FOR j IN 1..3 LOOP
      dbms_output.put_line('i is: ' || i || ' and j is: ' || j);
    END loop inner_loop;
  END loop outer_loop;
END;
/

```

When the above code is executed at the SQL prompt, it produces the following result –

```

i is: 1 and j is: 1
i is: 1 and j is: 2
i is: 1 and j is: 3
i is: 2 and j is: 1
i is: 2 and j is: 2
i is: 2 and j is: 3
i is: 3 and j is: 1
i is: 3 and j is: 2
i is: 3 and j is: 3

```

PL/SQL procedure successfully completed.

The Loop Control Statements

Loop control statements change execution from its normal sequence. When execution leaves a scope, all automatic objects that were created in that scope are destroyed.

PL/SQL supports the following control statements. Labeling loops also help in taking the control outside a loop. Click the following links to check their details.

S.No	Control Statement & Description
1	<u>EXIT statement</u> The Exit statement completes the loop and control passes to the statement immediately after the END LOOP.
2	<u>CONTINUE statement</u> Causes the loop to skip the remainder of its body and immediately retest its condition prior to reiterating.
3	<u>GOTO statement</u> Transfers control to the labeled statement. Though it is not advised to use the GOTO statement in your program.

PL/SQL – Strings

The string in PL/SQL is actually a sequence of characters with an optional size specification. The characters could be numeric, letters, blank, special characters or a combination of all. PL/SQL offers three kinds of strings –

- **Fixed-length strings** – In such strings, programmers specify the length while declaring the string. The string is right-padded with spaces to the length so specified.
- **Variable-length strings** – In such strings, a maximum length up to 32,767, for the string is specified and no padding takes place.
- **Character large objects (CLOBs)** – These are variable-length strings that can be up to 128 terabytes.

PL/SQL strings could be either variables or literals. A string literal is enclosed within quotation marks. For example,

```
'This is a string literal.' Or 'hello world'
```

To include a single quote inside a string literal, you need to type two single quotes next to one another. For example,

```
'this isn't what it looks like'
```

Declaring String Variables

Oracle database provides numerous string datatypes, such as CHAR, NCHAR, VARCHAR2, NVARCHAR2, CLOB, and NCLOB. The datatypes prefixed with an 'N' are **'national character set'** datatypes, that store Unicode character data.

If you need to declare a variable-length string, you must provide the maximum length of that string. For example, the VARCHAR2 data type. The following example illustrates declaring and using some string variables –

```
DECLARE
  name varchar2(20);
  company varchar2(30);
  introduction clob;
  choice char(1);
BEGIN
  name := 'John Smith';
```

```

company := 'Infotech';
introduction := ' Hello! I'm John Smith from Infotech.';
choice := 'y';
IF choice = 'y' THEN
    dbms_output.put_line(name);
    dbms_output.put_line(company);
    dbms_output.put_line(introduction);
END IF;
END;
/

```

When the above code is executed at the SQL prompt, it produces the following result –

```

John Smith
Infotech
Hello! I'm John Smith from Infotech.

```

PL/SQL procedure successfully completed

To declare a fixed-length string, use the CHAR datatype. Here you do not have to specify a maximum length for a fixed-length variable. If you leave off the length constraint, Oracle Database automatically uses a maximum length required. The following two declarations are identical –

```

red_flag CHAR(1) := 'Y';
red_flag CHAR := 'Y';

```

PL/SQL String Functions and Operators

PL/SQL offers the concatenation operator (||) for joining two strings. The following table provides the string functions provided by PL/SQL –

S.No	Function & Purpose
1	ASCII(x); Returns the ASCII value of the character x.
2	CHR(x); Returns the character with the ASCII value of x.
3	CONCAT(x, y); Concatenates the strings x and y and returns the appended string.
4	INITCAP(x); Converts the initial letter of each word in x to uppercase and returns that string.
5	INSTR(x, find_string [, start] [, occurrence]); Searches for find_string in x and returns the position at which it occurs.
6	INSTRB(x); Returns the location of a string within another string, but returns the value in bytes.
7	LENGTH(x);

	Returns the number of characters in <i>x</i> .
8	LENGTHB(x); Returns the length of a character string in bytes for single byte character set.
9	LOWER(x); Converts the letters in <i>x</i> to lowercase and returns that string.
10	LPAD(x, width [, pad_string]) ; Pads <i>x</i> with spaces to the left, to bring the total length of the string up to width characters.
11	LTRIM(x [, trim_string]); Trims characters from the left of <i>x</i> .
12	NANVL(x, value); Returns value if <i>x</i> matches the NaN special value (not a number), otherwise <i>x</i> is returned.
13	NLS_INITCAP(x); Same as the INITCAP function except that it can use a different sort method as specified by NLSSORT.
14	NLS_LOWER(x) ; Same as the LOWER function except that it can use a different sort method as specified by NLSSORT.
15	NLS_UPPER(x); Same as the UPPER function except that it can use a different sort method as specified by NLSSORT.
16	NLSSORT(x); Changes the method of sorting the characters. Must be specified before any NLS function; otherwise, the default sort will be used.
17	NVL(x, value); Returns value if <i>x</i> is null; otherwise, <i>x</i> is returned.
18	NVL2(x, value1, value2); Returns value1 if <i>x</i> is not null; if <i>x</i> is null, value2 is returned.
19	REPLACE(x, search_string, replace_string); Searches <i>x</i> for search_string and replaces it with replace_string.
20	RPAD(x, width [, pad_string]); Pads <i>x</i> to the right.
21	RTRIM(x [, trim_string]); Trims <i>x</i> from the right.

22	SOUNDEX(x) ; Returns a string containing the phonetic representation of x .
23	SUBSTR(x, start [, length]); Returns a substring of x that begins at the position specified by start . An optional length for the substring may be supplied.
24	SUBSTRB(x); Same as SUBSTR except that the parameters are expressed in bytes instead of characters for the single-byte character systems.
25	TRIM([trim_char FROM] x); Trims characters from the left and right of x .
26	UPPER(x); Converts the letters in x to uppercase and returns that string.

Let us now work out on a few examples to understand the concept –

Example 1

```

DECLARE
  greetings varchar2(11) := 'hello world';
BEGIN
  dbms_output.put_line(UPPER(greetings));

  dbms_output.put_line(LOWER(greetings));

  dbms_output.put_line(INITCAP(greetings));

  /* retrieve the first character in the string */
  dbms_output.put_line ( SUBSTR (greetings, 1, 1));

  /* retrieve the last character in the string */
  dbms_output.put_line ( SUBSTR (greetings, -1, 1));

  /* retrieve five characters,
   starting from the seventh position. */
  dbms_output.put_line ( SUBSTR (greetings, 7, 5));

  /* retrieve the remainder of the string,
   starting from the second position. */
  dbms_output.put_line ( SUBSTR (greetings, 2));

  /* find the location of the first "e" */
  dbms_output.put_line ( INSTR (greetings, 'e'));
END;
/

```

When the above code is executed at the SQL prompt, it produces the following result –

```
HELLO WORLD
```

```
hello world
Hello World
h
d
World
ello World
2
```

PL/SQL procedure successfully completed.

Example 2

```
DECLARE
  greetings varchar2(30) := '.....Hello World.....';
BEGIN
  dbms_output.put_line(RTRIM(greetings,'.));
  dbms_output.put_line(LTRIM(greetings, '.'));
  dbms_output.put_line(TRIM( '.' from greetings));
END;
/
```

When the above code is executed at the SQL prompt, it produces the following result –


```
.....Hello World
Hello World.....
Hello World
```

PL/SQL procedure successfully completed.

PL/SQL - Arrays

In this chapter, we will discuss arrays in PL/SQL. The PL/SQL programming language provides a data structure called the **VARRAY**, which can store a fixed-size sequential collection of elements of the same type. A varray is used to store an ordered collection of data, however it is often better to think of an array as a collection of variables of the same type.

All varrays consist of contiguous memory locations. The lowest address corresponds to the first element and the highest address to the last element.

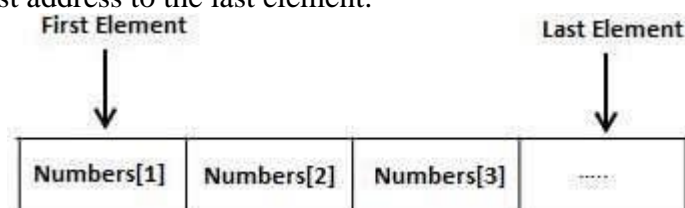

An array is a part of collection type data and it stands for variable-size arrays. We will study other collection types in a later chapter '**PL/SQL Collections**'.

Each element in a **varray** has an index associated with it. It also has a maximum size that can be changed dynamically.

Creating a Varray Type

A varray type is created with the **CREATE TYPE** statement. You must specify the maximum size and the type of elements stored in the varray.

The basic syntax for creating a VARRAY type at the schema level is –

```
CREATE OR REPLACE TYPE varray_type_name IS VARRAY(n) of <element_type>
```

Where,

- *varray_type_name* is a valid attribute name,
- *n* is the number of elements (maximum) in the varray,
- *element_type* is the data type of the elements of the array.

Maximum size of a varray can be changed using the **ALTER TYPE** statement.

For example,

```
CREATE Or REPLACE TYPE namearray AS VARRAY(3) OF VARCHAR2(10);
/
```

Type created.

The basic syntax for creating a VARRAY type within a PL/SQL block is –

```
TYPE varray_type_name IS VARRAY(n) of <element_type>
```

For example –

```
TYPE namearray IS VARRAY(5) OF VARCHAR2(10);
Type grades IS VARRAY(5) OF INTEGER;
```

Let us now work out on a few examples to understand the concept –

Example 1

The following program illustrates the use of varrays –

```
DECLARE
  type namesarray IS VARRAY(5) OF VARCHAR2(10);
  type grades IS VARRAY(5) OF INTEGER;
  names namesarray;
  marks grades;
  total integer;
BEGIN
  names := namesarray('Kavita', 'Pritam', 'Ayan', 'Rishav', 'Aziz');
  marks:= grades(98, 97, 78, 87, 92);
  total := names.count;
  dbms_output.put_line('Total '|| total || ' Students');
  FOR i in 1 .. total LOOP
    dbms_output.put_line('Student: ' || names(i) || '
    Marks: ' || marks(i));
  END LOOP;
END;
/
```

When the above code is executed at the SQL prompt, it produces the following result –

```
Total 5 Students
Student: Kavita Marks: 98
Student: Pritam Marks: 97
Student: Ayan Marks: 78
Student: Rishav Marks: 87
Student: Aziz Marks: 92
```

PL/SQL procedure successfully completed.

Please note –

- In Oracle environment, the starting index for varrays is always 1.

- You can initialize the varray elements using the constructor method of the varray type, which has the same name as the varray.
- Varrays are one-dimensional arrays.
- A varray is automatically NULL when it is declared and must be initialized before its elements can be referenced.

Example 2

Elements of a varray could also be a %ROWTYPE of any database table or %TYPE of any database table field. The following example illustrates the concept.

We will use the CUSTOMERS table stored in our database as –

```
Select * from customers;
```

```
+---+-----+---+-----+-----+
| ID | NAME   | AGE | ADDRESS | SALARY |
+---+-----+---+-----+-----+
| 1 | Ramesh | 32 | Ahmedabad | 2000.00 |
| 2 | Khilan | 25 | Delhi     | 1500.00 |
| 3 | kaushik | 23 | Kota      | 2000.00 |
| 4 | Chaitali | 25 | Mumbai    | 6500.00 |
| 5 | Hardik | 27 | Bhopal    | 8500.00 |
| 6 | Komal  | 22 | MP        | 4500.00 |
+---+-----+---+-----+-----+
```

Following example makes the use of **cursor**, which you will study in detail in a separate chapter.

```
DECLARE
  CURSOR c_customers is
  SELECT name FROM customers;
  type c_list is varray (6) of customers.name%type;
  name_list c_list := c_list();
  counter integer :=0;
BEGIN
  FOR n IN c_customers LOOP
    counter := counter + 1;
    name_list.extend;
    name_list(counter) := n.name;
    dbms_output.put_line('Customer('||counter ||')'||name_list(counter));
  END LOOP;
END;
/
```

When the above code is executed at the SQL prompt, it produces the following result –

```
Customer(1): Ramesh
Customer(2): Khilan
Customer(3): kaushik
Customer(4): Chaitali
Customer(5): Hardik
Customer(6): Komal
```

PL/SQL procedure successfully completed.

PL/SQL - Procedures

In this chapter, we will discuss Procedures in PL/SQL. A **subprogram** is a program unit/module that performs a particular task. These subprograms are combined to form larger programs. This is basically called the 'Modular design'. A subprogram can be invoked by another subprogram or program which is called the **calling program**.

A subprogram can be created –

- At the schema level
- Inside a package
- Inside a PL/SQL block

At the schema level, subprogram is a **standalone subprogram**. It is created with the CREATE PROCEDURE or the CREATE FUNCTION statement. It is stored in the database and can be deleted with the DROP PROCEDURE or DROP FUNCTION statement.

A subprogram created inside a package is a **packaged subprogram**. It is stored in the database and can be deleted only when the package is deleted with the DROP PACKAGE statement. We will discuss packages in the chapter '**PL/SQL - Packages**'.

PL/SQL subprograms are named PL/SQL blocks that can be invoked with a set of parameters. PL/SQL provides two kinds of subprograms –

- **Functions** – These subprograms return a single value; mainly used to compute and return a value.
- **Procedures** – These subprograms do not return a value directly; mainly used to perform an action.

This chapter is going to cover important aspects of a **PL/SQL procedure**. We will discuss **PL/SQL function** in the next chapter.

Parts of a PL/SQL Subprogram

Each PL/SQL subprogram has a name, and may also have a parameter list. Like anonymous PL/SQL blocks, the named blocks will also have the following three parts –

S.No	Parts & Description
1	Declarative Part It is an optional part. However, the declarative part for a subprogram does not start with the DECLARE keyword. It contains declarations of types, cursors, constants, variables, exceptions, and nested subprograms. These items are local to the subprogram and cease to exist when the subprogram completes execution.
2	Executable Part This is a mandatory part and contains statements that perform the designated action.
3	Exception-handling This is again an optional part. It contains the code that handles run-time errors.

Creating a Procedure

A procedure is created with the **CREATE OR REPLACE PROCEDURE** statement. The simplified syntax for the CREATE OR REPLACE PROCEDURE statement is as follows –

```
CREATE [OR REPLACE] PROCEDURE procedure_name  
[(parameter_name [IN | OUT | IN OUT] type [, ...])]  
{IS | AS}  
BEGIN
```

```
< procedure_body >  
END procedure_name;
```

Where,

- *procedure-name* specifies the name of the procedure.
- [OR REPLACE] option allows the modification of an existing procedure.
- The optional parameter list contains name, mode and types of the parameters. **IN** represents the value that will be passed from outside and **OUT** represents the parameter that will be used to return a value outside of the procedure.
- *procedure-body* contains the executable part.
- The AS keyword is used instead of the IS keyword for creating a standalone procedure.

Example

The following example creates a simple procedure that displays the string 'Hello World!' on the screen when executed.

```
CREATE OR REPLACE PROCEDURE greetings  
AS  
BEGIN  
    dbms_output.put_line('Hello World!');  
END;  
/
```

When the above code is executed using the SQL prompt, it will produce the following result –

Procedure created.

Executing a Standalone Procedure

A standalone procedure can be called in two ways –

- Using the **EXECUTE** keyword
- Calling the name of the procedure from a PL/SQL block

The above procedure named '**greetings**' can be called with the EXECUTE keyword as –

```
EXECUTE greetings;
```

The above call will display –

Hello World

PL/SQL procedure successfully completed.

The procedure can also be called from another PL/SQL block –

```
BEGIN  
    greetings;  
END;  
/
```

The above call will display –

Hello World

PL/SQL procedure successfully completed.

Deleting a Standalone Procedure

A standalone procedure is deleted with the **DROP PROCEDURE** statement. Syntax for deleting a procedure is –

```
DROP PROCEDURE procedure-name;
```

You can drop the greetings procedure by using the following statement –

```
DROP PROCEDURE greetings;
```

Parameter Modes in PL/SQL Subprograms

The following table lists out the parameter modes in PL/SQL subprograms –

S.No	Parameter Mode & Description
1	IN An IN parameter lets you pass a value to the subprogram. It is a read-only parameter. Inside the subprogram, an IN parameter acts like a constant. It cannot be assigned a value. You can pass a constant, literal, initialized variable, or expression as an IN parameter. You can also initialize it to a default value; however, in that case, it is omitted from the subprogram call. It is the default mode of parameter passing. Parameters are passed by reference.
2	OUT An OUT parameter returns a value to the calling program. Inside the subprogram, an OUT parameter acts like a variable. You can change its value and reference the value after assigning it. The actual parameter must be variable and it is passed by value.
3	IN OUT An IN OUT parameter passes an initial value to a subprogram and returns an updated value to the caller. It can be assigned a value and the value can be read. The actual parameter corresponding to an IN OUT formal parameter must be a variable, not a constant or an expression. Formal parameter must be assigned a value. Actual parameter is passed by value.

IN & OUT Mode Example 1

This program finds the minimum of two values. Here, the procedure takes two numbers using the IN mode and returns their minimum using the OUT parameters.

```
DECLARE
  a number;
  b number;
  c number;
PROCEDURE findMin(x IN number, y IN number, z OUT number) IS
BEGIN
  IF x < y THEN
    z:= x;
  ELSE
    z:= y;
  END IF;
END;
BEGIN
  a:= 23;
  b:= 45;
  findMin(a, b, c);
```



```
dbms_output.put_line(' Minimum of (23, 45) : ' || c);
END;
/
```

When the above code is executed at the SQL prompt, it produces the following result –

```
Minimum of (23, 45) : 23
```

```
PL/SQL procedure successfully completed.
```

IN & OUT Mode Example 2

This procedure computes the square of value of a passed value. This example shows how we can use the same parameter to accept a value and then return another result.

```
DECLARE
  a number;
PROCEDURE squareNum(x IN OUT number) IS
BEGIN
  x := x * x;
END;
BEGIN
  a:= 23;
  squareNum(a);
  dbms_output.put_line(' Square of (23): ' || a);
END;
/
```

When the above code is executed at the SQL prompt, it produces the following result –

```
Square of (23): 529
```

```
PL/SQL procedure successfully completed.
```

Methods for Passing Parameters

Actual parameters can be passed in three ways –

- Positional notation
- Named notation
- Mixed notation

Positional Notation

In positional notation, you can call the procedure as –

```
findMin(a, b, c, d);
```

In positional notation, the first actual parameter is substituted for the first formal parameter; the second actual parameter is substituted for the second formal parameter, and so on. So, **a** is substituted for **x**, **b** is substituted for **y**, **c** is substituted for **z** and **d** is substituted for **m**.

Named Notation

In named notation, the actual parameter is associated with the formal parameter using the **arrow symbol** (**=>**). The procedure call will be like the following –

```
findMin(x => a, y => b, z => c, m => d);
```

Mixed Notation

In mixed notation, you can mix both notations in procedure call; however, the positional notation should precede the named notation.

The following call is legal –

```
findMin(a, b, c, m => d);
```

However, this is not legal:

```
findMin(x => a, b, c, d);
```

PL/SQL - Functions

In this chapter, we will discuss the functions in PL/SQL. A function is same as a procedure except that it returns a value. Therefore, all the discussions of the previous chapter are true for functions too.

Creating a Function

A standalone function is created using the **CREATE FUNCTION** statement. The simplified syntax for the **CREATE OR REPLACE PROCEDURE** statement is as follows –

```
CREATE [OR REPLACE] FUNCTION function_name
[(parameter_name [IN | OUT | IN OUT] type [, ...])]
RETURN return_datatype
{IS | AS}
BEGIN
  < function_body >
END [function_name];
```

Where,

- *function-name* specifies the name of the function.
- [OR REPLACE] option allows the modification of an existing function.
- The optional parameter list contains name, mode and types of the parameters. IN represents the value that will be passed from outside and OUT represents the parameter that will be used to return a value outside of the procedure.
- The function must contain a **return** statement.
- The *RETURN* clause specifies the data type you are going to return from the function.
- *function-body* contains the executable part.
- The AS keyword is used instead of the IS keyword for creating a standalone function.

Example

The following example illustrates how to create and call a standalone function. This function returns the total number of CUSTOMERS in the customers table.

We will use the CUSTOMERS table, which we had created in the PL/SQL Variables chapter –

```
Select * from customers;
```

```
+-----+-----+-----+-----+
| ID | NAME   | AGE | ADDRESS | SALARY |
+-----+-----+-----+-----+
| 1 | Ramesh | 32 | Ahmedabad | 2000.00 |
| 2 | Khilan | 25 | Delhi     | 1500.00 |
| 3 | kaushik | 23 | Kota      | 2000.00 |
| 4 | Chaitali | 25 | Mumbai   | 6500.00 |
| 5 | Hardik | 27 | Bhopal    | 8500.00 |
| 6 | Komal  | 22 | MP        | 4500.00 |
+-----+-----+-----+-----+
```

```
CREATE OR REPLACE FUNCTION totalCustomers
RETURN number IS
  total number(2) := 0;
```

```

BEGIN
  SELECT count(*) into total
  FROM customers;

  RETURN total;
END;
/

```

When the above code is executed using the SQL prompt, it will produce the following result –

Function created.

Calling a Function

While creating a function, you give a definition of what the function has to do. To use a function, you will have to call that function to perform the defined task. When a program calls a function, the program control is transferred to the called function.

A called function performs the defined task and when its return statement is executed or when the **last end statement** is reached, it returns the program control back to the main program.

To call a function, you simply need to pass the required parameters along with the function name and if the function returns a value, then you can store the returned value. Following program calls the function **totalCustomers** from an anonymous block –

```

DECLARE
  c number(2);
BEGIN
  c := totalCustomers();
  dbms_output.put_line('Total no. of Customers: ' || c);
END;
/

```

When the above code is executed at the SQL prompt, it produces the following result –

Total no. of Customers: 6

PL/SQL procedure successfully completed.

Example

The following example demonstrates Declaring, Defining, and Invoking a Simple PL/SQL Function that computes and returns the maximum of two values.

```

DECLARE
  a number;
  b number;
  c number;
FUNCTION findMax(x IN number, y IN number)
RETURN number
IS
  z number;
BEGIN
  IF x > y THEN
    z:= x;
  ELSE
    Z:= y;
  END IF;

```

```

RETURN z;
END;
BEGIN
  a:= 23;
  b:= 45;
  c := findMax(a, b);
  dbms_output.put_line(' Maximum of (23,45): ' || c);
END;
/

```

When the above code is executed at the SQL prompt, it produces the following result –

```
Maximum of (23,45): 45
```

```
PL/SQL procedure successfully completed.
```

PL/SQL Recursive Functions

We have seen that a program or subprogram may call another subprogram. When a subprogram calls itself, it is referred to as a recursive call and the process is known as **recursion**.

To illustrate the concept, let us calculate the factorial of a number. Factorial of a number n is defined as –

$$\begin{aligned}
 n! &= n*(n-1)! \\
 &= n*(n-1)*(n-2)! \\
 &\dots \\
 &= n*(n-1)*(n-2)*(n-3)\dots 1
 \end{aligned}$$

The following program calculates the factorial of a given number by calling itself recursively –

```

DECLARE
  num number;
  factorial number;

FUNCTION fact(x number)
RETURN number
IS
  f number;
BEGIN
  IF x=0 THEN
    f := 1;
  ELSE
    f := x * fact(x-1);
  END IF;
RETURN f;
END;

BEGIN
  num:= 6;
  factorial := fact(num);
  dbms_output.put_line(' Factorial ' || num || ' is ' || factorial);
END;
/

```

When the above code is executed at the SQL prompt, it produces the following result –

Factorial 6 is 720

PL/SQL procedure successfully completed.

PL/SQL - Cursors

In this chapter, we will discuss the cursors in PL/SQL. Oracle creates a memory area, known as the context area, for processing an SQL statement, which contains all the information needed for processing the statement; for example, the number of rows processed, etc.

A **cursor** is a pointer to this context area. PL/SQL controls the context area through a cursor. A cursor holds the rows (one or more) returned by a SQL statement. The set of rows the cursor holds is referred to as the **active set**.

You can name a cursor so that it could be referred to in a program to fetch and process the rows returned by the SQL statement, one at a time. There are two types of cursors –

- Implicit cursors
- Explicit cursors

Implicit Cursors

Implicit cursors are automatically created by Oracle whenever an SQL statement is executed, when there is no explicit cursor for the statement. Programmers cannot control the implicit cursors and the information in it.

Whenever a DML statement (INSERT, UPDATE and DELETE) is issued, an implicit cursor is associated with this statement. For INSERT operations, the cursor holds the data that needs to be inserted. For UPDATE and DELETE operations, the cursor identifies the rows that would be affected.

In PL/SQL, you can refer to the most recent implicit cursor as the **SQL cursor**, which always has attributes such as **%FOUND**, **%ISOPEN**, **%NOTFOUND**, and **%ROWCOUNT**. The SQL cursor has additional attributes, **%BULK_ROWCOUNT** and **%BULK_EXCEPTIONS**, designed for use with the **FORALL** statement. The following table provides the description of the most used attributes –

S.No	Attribute & Description
1	%FOUND Returns TRUE if an INSERT, UPDATE, or DELETE statement affected one or more rows or a SELECT INTO statement returned one or more rows. Otherwise, it returns FALSE.
2	%NOTFOUND The logical opposite of %FOUND. It returns TRUE if an INSERT, UPDATE, or DELETE statement affected no rows, or a SELECT INTO statement returned no rows. Otherwise, it returns FALSE.
3	%ISOPEN Always returns FALSE for implicit cursors, because Oracle closes the SQL cursor automatically after executing its associated SQL statement.
4	%ROWCOUNT Returns the number of rows affected by an INSERT, UPDATE, or DELETE statement, or returned by a SELECT INTO statement.

Any SQL cursor attribute will be accessed as **sql%attribute_name** as shown below in the example.

Example

We will be using the CUSTOMERS table we had created and used in the previous chapters.

```
Select * from customers;
```

```
+-----+-----+-----+-----+
| ID | NAME   | AGE | ADDRESS | SALARY |
+-----+-----+-----+-----+
| 1 | Ramesh | 32 | Ahmedabad | 2000.00 |
| 2 | Khilan | 25 | Delhi     | 1500.00 |
| 3 | kaushik | 23 | Kota      | 2000.00 |
| 4 | Chaitali | 25 | Mumbai   | 6500.00 |
| 5 | Hardik | 27 | Bhopal    | 8500.00 |
| 6 | Komal   | 22 | MP        | 4500.00 |
+-----+-----+-----+-----+
```

The following program will update the table and increase the salary of each customer by 500 and use the **SQL%ROWCOUNT** attribute to determine the number of rows affected –

```
DECLARE
  total_rows number(2);
BEGIN
  UPDATE customers
  SET salary = salary + 500;
  IF sql%notfound THEN
    dbms_output.put_line('no customers selected');
  ELSIF sql%found THEN
    total_rows := sql%rowcount;
    dbms_output.put_line( total_rows || ' customers selected ');
  END IF;
END;
/
```

When the above code is executed at the SQL prompt, it produces the following result –

```
6 customers selected
```

```
PL/SQL procedure successfully completed.
```

If you check the records in customers table, you will find that the rows have been updated –

```
Select * from customers;
```

```
+-----+-----+-----+-----+
| ID | NAME   | AGE | ADDRESS | SALARY |
+-----+-----+-----+-----+
| 1 | Ramesh | 32 | Ahmedabad | 2500.00 |
| 2 | Khilan | 25 | Delhi     | 2000.00 |
| 3 | kaushik | 23 | Kota      | 2500.00 |
| 4 | Chaitali | 25 | Mumbai   | 7000.00 |
| 5 | Hardik | 27 | Bhopal    | 9000.00 |
```

```
| 6 | Komal | 22 | MP | 5000.00 |
+-----+-----+-----+-----+
```

Explicit Cursors

Explicit cursors are programmer-defined cursors for gaining more control over the **context area**. An explicit cursor should be defined in the declaration section of the PL/SQL Block. It is created on a SELECT Statement which returns more than one row.

The syntax for creating an explicit cursor is –

```
CURSOR cursor_name IS select_statement;
```

Working with an explicit cursor includes the following steps –

- Declaring the cursor for initializing the memory
- Opening the cursor for allocating the memory
- Fetching the cursor for retrieving the data
- Closing the cursor to release the allocated memory

Declaring the Cursor

Declaring the cursor defines the cursor with a name and the associated SELECT statement. For example –

```
CURSOR c_customers IS
SELECT id, name, address FROM customers;
```

Opening the Cursor

Opening the cursor allocates the memory for the cursor and makes it ready for fetching the rows returned by the SQL statement into it. For example, we will open the above defined cursor as follows –

```
OPEN c_customers;
```

Fetching the Cursor

Fetching the cursor involves accessing one row at a time. For example, we will fetch rows from the above-opened cursor as follows –

```
FETCH c_customers INTO c_id, c_name, c_addr;
```

Closing the Cursor

Closing the cursor means releasing the allocated memory. For example, we will close the above-opened cursor as follows –

```
CLOSE c_customers;
```

Example

Following is a complete example to illustrate the concepts of explicit cursors & minus;

```
DECLARE
  c_id customers.id%type;
  c_name customerS.No.ame%type;
  c_addr customers.address%type;
  CURSOR c_customers is
    SELECT id, name, address FROM customers;
BEGIN
  OPEN c_customers;
  LOOP
    FETCH c_customers into c_id, c_name, c_addr;
    EXIT WHEN c_customers%notfound;
```

```

    dbms_output.put_line(c_id || ' ' || c_name || ' ' || c_addr);
END LOOP;
CLOSE c_customers;
END;
/

```

When the above code is executed at the SQL prompt, it produces the following result –

```

1 Ramesh Ahmedabad
2 Khilan Delhi
3 kaushik Kota
4 Chaitali Mumbai
5 Hardik Bhopal
6 Komal MP

```

PL/SQL procedure successfully completed.

PL/SQL - Records

In this chapter, we will discuss Records in PL/SQL. A **record** is a data structure that can hold data items of different kinds. Records consist of different fields, similar to a row of a database table. For example, you want to keep track of your books in a library. You might want to track the following attributes about each book, such as Title, Author, Subject, Book ID. A record containing a field for each of these items allows treating a BOOK as a logical unit and allows you to organize and represent its information in a better way.

PL/SQL can handle the following types of records –

- Table-based
- Cursor-based records
- User-defined records

Table-Based Records

The `%ROWTYPE` attribute enables a programmer to create **table-based** and **cursorbased** records.

The following example illustrates the concept of **table-based** records. We will be using the CUSTOMERS table we had created and used in the previous chapters –

```

DECLARE
    customer_rec customers%rowtype;
BEGIN
    SELECT * into customer_rec
    FROM customers
    WHERE id = 5;
    dbms_output.put_line('Customer ID: ' || customer_rec.id);
    dbms_output.put_line('Customer Name: ' || customer_rec.name);
    dbms_output.put_line('Customer Address: ' || customer_rec.address);
    dbms_output.put_line('Customer Salary: ' || customer_rec.salary);
END;
/

```

When the above code is executed at the SQL prompt, it produces the following result –

```

Customer ID: 5
Customer Name: Hardik
Customer Address: Bhopal

```


Customer Salary: 9000

PL/SQL procedure successfully completed.

Cursor-Based Records

The following example illustrates the concept of **cursor-based** records. We will be using the CUSTOMERS table we had created and used in the previous chapters –

```
DECLARE
  CURSOR customer_cur is
    SELECT id, name, address
    FROM customers;
  customer_rec customer_cur%rowtype;
BEGIN
  OPEN customer_cur;
  LOOP
    FETCH customer_cur into customer_rec;
    EXIT WHEN customer_cur%notfound;
    DBMS_OUTPUT.put_line(customer_rec.id || ' ' || customer_rec.name);
  END LOOP;
END;
/
```

When the above code is executed at the SQL prompt, it produces the following result –

```
1 Ramesh
2 Khilan
3 kaushik
4 Chaitali
5 Hardik
6 Komal
```

PL/SQL procedure successfully completed.

User-Defined Records

PL/SQL provides a user-defined record type that allows you to define the different record structures. These records consist of different fields. Suppose you want to keep track of your books in a library. You might want to track the following attributes about each book –

- Title
- Author
- Subject
- Book ID

Defining a Record

The record type is defined as –

```
TYPE
type_name IS RECORD
( field_name1 datatype1 [NOT NULL] [:= DEFAULT EXPRESSION],
  field_name2 datatype2 [NOT NULL] [:= DEFAULT EXPRESSION],
  ...
  field_nameN datatypeN [NOT NULL] [:= DEFAULT EXPRESSION]);
record-name type_name;
```

The Book record is declared in the following way –

```
DECLARE
TYPE books IS RECORD
(title varchar(50),
 author varchar(50),
 subject varchar(100),
 book_id number);
book1 books;
book2 books;
```

Accessing Fields

To access any field of a record, we use the dot (.) operator. The member access operator is coded as a period between the record variable name and the field that we wish to access. Following is an example to explain the usage of record –

```
DECLARE
type books is record
(title varchar(50),
 author varchar(50),
 subject varchar(100),
 book_id number);
book1 books;
book2 books;
BEGIN
-- Book 1 specification
book1.title := 'C Programming';
book1.author := 'Nuha Ali ';
book1.subject := 'C Programming Tutorial';
book1.book_id := 6495407;
-- Book 2 specification
book2.title := 'Telecom Billing';
book2.author := 'Zara Ali';
book2.subject := 'Telecom Billing Tutorial';
book2.book_id := 6495700;

-- Print book 1 record
dbms_output.put_line('Book 1 title : ' || book1.title);
dbms_output.put_line('Book 1 author : ' || book1.author);
dbms_output.put_line('Book 1 subject : ' || book1.subject);
dbms_output.put_line('Book 1 book_id : ' || book1.book_id);

-- Print book 2 record
dbms_output.put_line('Book 2 title : ' || book2.title);
dbms_output.put_line('Book 2 author : ' || book2.author);
dbms_output.put_line('Book 2 subject : ' || book2.subject);
dbms_output.put_line('Book 2 book_id : ' || book2.book_id);
END;
/
```

When the above code is executed at the SQL prompt, it produces the following result –

```
Book 1 title : C Programming
Book 1 author : Nuha Ali
Book 1 subject : C Programming Tutorial
Book 1 book_id : 6495407
Book 2 title : Telecom Billing
Book 2 author : Zara Ali
Book 2 subject : Telecom Billing Tutorial
Book 2 book_id : 6495700
```

PL/SQL procedure successfully completed.

Records as Subprogram Parameters

You can pass a record as a subprogram parameter just as you pass any other variable. You can also access the record fields in the same way as you accessed in the above example –

```
DECLARE
  type books is record
    (title varchar(50),
     author varchar(50),
     subject varchar(100),
     book_id number);
  book1 books;
  book2 books;
PROCEDURE printbook (book books) IS
BEGIN
  dbms_output.put_line ('Book title : ' || book.title);
  dbms_output.put_line ('Book author : ' || book.author);
  dbms_output.put_line ('Book subject : ' || book.subject);
  dbms_output.put_line ('Book book_id : ' || book.book_id);
END;

BEGIN
  -- Book 1 specification
  book1.title := 'C Programming';
  book1.author := 'Nuha Ali ';
  book1.subject := 'C Programming Tutorial';
  book1.book_id := 6495407;

  -- Book 2 specification
  book2.title := 'Telecom Billing';
  book2.author := 'Zara Ali';
  book2.subject := 'Telecom Billing Tutorial';
  book2.book_id := 6495700;

  -- Use procedure to print book info
  printbook(book1);
  printbook(book2);
END;
/
```

When the above code is executed at the SQL prompt, it produces the following result –

```
Book title : C Programming
Book author : Nuha Ali
Book subject : C Programming Tutorial
Book book_id : 6495407
Book title : Telecom Billing
Book author : Zara Ali
Book subject : Telecom Billing Tutorial
Book book_id : 6495700
```

PL/SQL procedure successfully completed.

PL/SQL - Exceptions

In this chapter, we will discuss Exceptions in PL/SQL. An exception is an error condition during a program execution. PL/SQL supports programmers to catch such conditions using **EXCEPTION** block in the program and an appropriate action is taken against the error condition. There are two types of exceptions –

- System-defined exceptions
- User-defined exceptions

Syntax for Exception Handling

The general syntax for exception handling is as follows. Here you can list down as many exceptions as you can handle. The default exception will be handled using **WHEN others THEN** –

```
DECLARE
  <declarations section>
BEGIN
  <executable command(s)>
EXCEPTION
  <exception handling goes here >
  WHEN exception1 THEN
    exception1-handling-statements
  WHEN exception2 THEN
    exception2-handling-statements
  WHEN exception3 THEN
    exception3-handling-statements
  .....
  WHEN others THEN
    exception3-handling-statements
END;
```

Example

Let us write a code to illustrate the concept. We will be using the CUSTOMERS table we had created and used in the previous chapters –

```
DECLARE
  c_id customers.id%type := 8;
  c_name customerS.Name%type;
  c_addr customers.address%type;
BEGIN
  SELECT name, address INTO c_name, c_addr
```

```

FROM customers
WHERE id = c_id;
DBMS_OUTPUT.PUT_LINE ('Name: ' || c_name);
DBMS_OUTPUT.PUT_LINE ('Address: ' || c_addr);

EXCEPTION
  WHEN no_data_found THEN
    dbms_output.put_line('No such customer!');
  WHEN others THEN
    dbms_output.put_line('Error!');
END;
/

```

When the above code is executed at the SQL prompt, it produces the following result –

```
No such customer!
```

```
PL/SQL procedure successfully completed.
```

The above program displays the name and address of a customer whose ID is given. Since there is no customer with ID value 8 in our database, the program raises the run-time exception **NO_DATA_FOUND**, which is captured in the **EXCEPTION block**.

Raising Exceptions

Exceptions are raised by the database server automatically whenever there is any internal database error, but exceptions can be raised explicitly by the programmer by using the command **RAISE**. Following is the simple syntax for raising an exception –

```

DECLARE
  exception_name EXCEPTION;
BEGIN
  IF condition THEN
    RAISE exception_name;
  END IF;
EXCEPTION
  WHEN exception_name THEN
    statement;
END;

```

You can use the above syntax in raising the Oracle standard exception or any user-defined exception. In the next section, we will give you an example on raising a user-defined exception. You can raise the Oracle standard exceptions in a similar way.

User-defined Exceptions

PL/SQL allows you to define your own exceptions according to the need of your program. A user-defined exception must be declared and then raised explicitly, using either a **RAISE** statement or the procedure **DBMS_STANDARD.RAISE_APPLICATION_ERROR**.

The syntax for declaring an exception is –

```

DECLARE
  my-exception EXCEPTION;

```

Example

The following example illustrates the concept. This program asks for a customer ID, when the user enters an invalid ID, the exception **invalid_id** is raised.

```

DECLARE
  c_id customers.id%type := &cc_id;
  c_name customerS.Name%type;
  c_addr customers.address%type;
  -- user defined exception
  ex_invalid_id EXCEPTION;
BEGIN
  IF c_id <= 0 THEN
    RAISE ex_invalid_id;
  ELSE
    SELECT name, address INTO c_name, c_addr
    FROM customers
    WHERE id = c_id;
    DBMS_OUTPUT.PUT_LINE ('Name: ' || c_name);
    DBMS_OUTPUT.PUT_LINE ('Address: ' || c_addr);
  END IF;

EXCEPTION
  WHEN ex_invalid_id THEN
    dbms_output.put_line('ID must be greater than zero!');
  WHEN no_data_found THEN
    dbms_output.put_line('No such customer!');
  WHEN others THEN
    dbms_output.put_line('Error!');
END;
/

```

When the above code is executed at the SQL prompt, it produces the following result –

```

Enter value for cc_id: -6 (let's enter a value -6)
old 2: c_id customers.id%type := &cc_id;
new 2: c_id customers.id%type := -6;
ID must be greater than zero!

```

PL/SQL procedure successfully completed.

Pre-defined Exceptions

PL/SQL provides many pre-defined exceptions, which are executed when any database rule is violated by a program. For example, the predefined exception NO_DATA_FOUND is raised when a SELECT INTO statement returns no rows. The following table lists few of the important pre-defined exceptions –

Exception	Oracle Error	SQLCODE	Description
ACCESS_INTO_NULL	06530	-6530	It is raised when a null object is automatically assigned a value.
CASE_NOT_FOUND	06592	-6592	It is raised when none of the choices in the WHEN clause of a CASE

			statement is selected, and there is no ELSE clause.
COLLECTION_IS_NULL	06531	-6531	It is raised when a program attempts to apply collection methods other than EXISTS to an uninitialized nested table or varray, or the program attempts to assign values to the elements of an uninitialized nested table or varray.
DUP_VAL_ON_INDEX	00001	-1	It is raised when duplicate values are attempted to be stored in a column with unique index.
INVALID_CURSOR	01001	-1001	It is raised when attempts are made to make a cursor operation that is not allowed, such as closing an unopened cursor.
INVALID_NUMBER	01722	-1722	It is raised when the conversion of a character string into a number fails because the string does not represent a valid number.
LOGIN_DENIED	01017	-1017	It is raised when a program attempts to log on to the database with an invalid username or password.
NO_DATA_FOUND	01403	+100	It is raised when a SELECT INTO statement returns no rows.
NOT_LOGGED_ON	01012	-1012	It is raised when a database call is issued without being connected to the database.
PROGRAM_ERROR	06501	-6501	It is raised when PL/SQL has an internal problem.
ROWTYPE_MISMATCH	06504	-6504	It is raised when a cursor fetches value in a variable having incompatible data type.
SELF_IS_NULL	30625	-30625	It is raised when a member method is invoked, but the instance of the object type was not initialized.
STORAGE_ERROR	06500	-6500	It is raised when PL/SQL ran out of

			memory or memory was corrupted.
TOO_MANY_ROWS	01422	-1422	It is raised when a SELECT INTO statement returns more than one row.
VALUE_ERROR	06502	-6502	It is raised when an arithmetic, conversion, truncation, or sizeconstraint error occurs.
ZERO_DIVIDE	01476	1476	It is raised when an attempt is made to divide a number by zero.

PL/SQL - Triggers

In this chapter, we will discuss Triggers in PL/SQL. Triggers are stored programs, which are automatically executed or fired when some events occur. Triggers are, in fact, written to be executed in response to any of the following events –

- A **database manipulation (DML)** statement (DELETE, INSERT, or UPDATE)
- A **database definition (DDL)** statement (CREATE, ALTER, or DROP).
- A **database operation** (SERVERERROR, LOGON, LOGOFF, STARTUP, or SHUTDOWN).

Triggers can be defined on the table, view, schema, or database with which the event is associated.

Benefits of Triggers

Triggers can be written for the following purposes –

- Generating some derived column values automatically
- Enforcing referential integrity
- Event logging and storing information on table access
- Auditing
- Synchronous replication of tables
- Imposing security authorizations
- Preventing invalid transactions

Creating Triggers

The syntax for creating a trigger is –

```
CREATE [OR REPLACE ] TRIGGER trigger_name
{BEFORE | AFTER | INSTEAD OF }
{INSERT [OR] | UPDATE [OR] | DELETE }
[OF col_name]
ON table_name
[REFERENCING OLD AS o NEW AS n]
[FOR EACH ROW]
WHEN (condition)
DECLARE
  Declaration-statements
BEGIN
  Executable-statements
EXCEPTION
  Exception-handling-statements
END;
```


Where,

- CREATE [OR REPLACE] TRIGGER trigger_name – Creates or replaces an existing trigger with the *trigger_name*.
- {BEFORE | AFTER | INSTEAD OF} – This specifies when the trigger will be executed. The INSTEAD OF clause is used for creating trigger on a view.
- {INSERT [OR] | UPDATE [OR] | DELETE} – This specifies the DML operation.
- [OF col_name] – This specifies the column name that will be updated.
- [ON table_name] – This specifies the name of the table associated with the trigger.
- [REFERENCING OLD AS o NEW AS n] – This allows you to refer new and old values for various DML statements, such as INSERT, UPDATE, and DELETE.
- [FOR EACH ROW] – This specifies a row-level trigger, i.e., the trigger will be executed for each row being affected. Otherwise the trigger will execute just once when the SQL statement is executed, which is called a table level trigger.
- WHEN (condition) – This provides a condition for rows for which the trigger would fire. This clause is valid only for row-level triggers.

Example

To start with, we will be using the CUSTOMERS table we had created and used in the previous chapters –

```
Select * from customers;
```

```
+-----+-----+-----+-----+
| ID | NAME   | AGE | ADDRESS | SALARY |
+-----+-----+-----+-----+
| 1 | Ramesh | 32 | Ahmedabad | 2000.00 |
| 2 | Khilan | 25 | Delhi     | 1500.00 |
| 3 | kaushik | 23 | Kota      | 2000.00 |
| 4 | Chaitali | 25 | Mumbai   | 6500.00 |
| 5 | Hardik | 27 | Bhopal   | 8500.00 |
| 6 | Komal  | 22 | MP       | 4500.00 |
+-----+-----+-----+-----+
```

The following program creates a **row-level** trigger for the customers table that would fire for INSERT or UPDATE or DELETE operations performed on the CUSTOMERS table. This trigger will display the salary difference between the old values and new values –

```
CREATE OR REPLACE TRIGGER display_salary_changes
BEFORE DELETE OR INSERT OR UPDATE ON customers
FOR EACH ROW
WHEN (NEW.ID > 0)
DECLARE
    sal_diff number;
BEGIN
    sal_diff := :NEW.salary - :OLD.salary;
    dbms_output.put_line('Old salary: ' || :OLD.salary);
    dbms_output.put_line('New salary: ' || :NEW.salary);
    dbms_output.put_line('Salary difference: ' || sal_diff);
END;
/
```

When the above code is executed at the SQL prompt, it produces the following result –

Trigger created.

The following points need to be considered here –

- OLD and NEW references are not available for table-level triggers, rather you can use them for record-level triggers.
- If you want to query the table in the same trigger, then you should use the AFTER keyword, because triggers can query the table or change it again only after the initial changes are applied and the table is back in a consistent state.
- The above trigger has been written in such a way that it will fire before any DELETE or INSERT or UPDATE operation on the table, but you can write your trigger on a single or multiple operations, for example BEFORE DELETE, which will fire whenever a record will be deleted using the DELETE operation on the table.

Triggering a Trigger

Let us perform some DML operations on the CUSTOMERS table. Here is one INSERT statement, which will create a new record in the table –

```
INSERT INTO CUSTOMERS (ID,NAME,AGE,ADDRESS,SALARY)
VALUES (7, 'Kriti', 22, 'HP', 7500.00 );
```

When a record is created in the CUSTOMERS table, the above create trigger, **display_salary_changes** will be fired and it will display the following result –

```
Old salary:
New salary: 7500
Salary difference:
```

Because this is a new record, old salary is not available and the above result comes as null. Let us now perform one more DML operation on the CUSTOMERS table. The UPDATE statement will update an existing record in the table –

```
UPDATE customers
SET salary = salary + 500
WHERE id = 2;
```

When a record is updated in the CUSTOMERS table, the above create trigger, **display_salary_changes** will be fired and it will display the following result –

```
Old salary: 1500
New salary: 2000
Salary difference: 500
```

PL/SQL - Packages

In this chapter, we will discuss the Packages in PL/SQL. Packages are schema objects that groups logically related PL/SQL types, variables, and subprograms.

A package will have two mandatory parts –

- Package specification
- Package body or definition

Package Specification

The specification is the interface to the package. It just **DECLARES** the types, variables, constants, exceptions, cursors, and subprograms that can be referenced from outside the package. In other words, it contains all information about the content of the package, but excludes the code for the subprograms.

All objects placed in the specification are called **public** objects. Any subprogram not in the package specification but coded in the package body is called a **private** object.

The following code snippet shows a package specification having a single procedure. You can have many global variables defined and multiple procedures or functions inside a package.

```
CREATE PACKAGE cust_sal AS
  PROCEDURE find_sal(c_id customers.id%type);
END cust_sal;
/
```

When the above code is executed at the SQL prompt, it produces the following result –

```
Package created.
```

Package Body

The package body has the codes for various methods declared in the package specification and other private declarations, which are hidden from the code outside the package.

The **CREATE PACKAGE BODY** Statement is used for creating the package body. The following code snippet shows the package body declaration for the *cust_sal* package created above. I assumed that we already have CUSTOMERS table created in our database as mentioned in the [PL/SQL - Variables](#) chapter.

```
CREATE OR REPLACE PACKAGE BODY cust_sal AS

  PROCEDURE find_sal(c_id customers.id%TYPE) IS
    c_sal customers.salary%TYPE;
  BEGIN
    SELECT salary INTO c_sal
    FROM customers
    WHERE id = c_id;
    dbms_output.put_line('Salary: || c_sal);
  END find_sal;
END cust_sal;
/
```

When the above code is executed at the SQL prompt, it produces the following result –

```
Package body created.
```

Using the Package Elements

The package elements (variables, procedures or functions) are accessed with the following syntax –

```
package_name.element_name;
```

Consider, we already have created the above package in our database schema, the following program uses the *find_sal* method of the *cust_sal* package –

```
DECLARE
  code customers.id%type := &cc_id;
BEGIN
  cust_sal.find_sal(code);
END;
/
```

When the above code is executed at the SQL prompt, it prompts to enter the customer ID and when you enter an ID, it displays the corresponding salary as follows –

```
Enter value for cc_id: 1
```

Salary: 3000

PL/SQL procedure successfully completed.

Example

The following program provides a more complete package. We will use the CUSTOMERS table stored in our database with the following records –

Select * from customers;

```
+-----+-----+-----+-----+
| ID | NAME   | AGE | ADDRESS | SALARY |
+-----+-----+-----+-----+
| 1 | Ramesh | 32 | Ahmedabad | 3000.00 |
| 2 | Khilan | 25 | Delhi     | 3000.00 |
| 3 | kaushik | 23 | Kota      | 3000.00 |
| 4 | Chaitali | 25 | Mumbai    | 7500.00 |
| 5 | Hardik | 27 | Bhopal    | 9500.00 |
| 6 | Komal   | 22 | MP        | 5500.00 |
+-----+-----+-----+-----+
```

The Package Specification

```
CREATE OR REPLACE PACKAGE c_package AS
  -- Adds a customer
  PROCEDURE addCustomer(c_id customers.id%type,
    c_name customerS.No.ame%type,
    c_age customers.age%type,
    c_addr customers.address%type,
    c_sal customers.salary%type);

  -- Removes a customer
  PROCEDURE delCustomer(c_id customers.id%TYPE);
  --Lists all customers
  PROCEDURE listCustomer;

END c_package;
/
```

When the above code is executed at the SQL prompt, it creates the above package and displays the following result –

Package created.

Creating the Package Body

```
CREATE OR REPLACE PACKAGE BODY c_package AS
  PROCEDURE addCustomer(c_id customers.id%type,
    c_name customerS.No.ame%type,
    c_age customers.age%type,
    c_addr customers.address%type,
    c_sal customers.salary%type)
  IS
  BEGIN
```

```

INSERT INTO customers (id,name,age,address,salary)
VALUES(c_id, c_name, c_age, c_addr, c_sal);
END addCustomer;

PROCEDURE delCustomer(c_id customers.id%type) IS
BEGIN
DELETE FROM customers
WHERE id = c_id;
END delCustomer;

PROCEDURE listCustomer IS
CURSOR c_customers is
SELECT name FROM customers;
TYPE c_list is TABLE OF customerS.No.ame%type;
name_list c_list := c_list();
counter integer :=0;
BEGIN
FOR n IN c_customers LOOP
counter := counter +1;
name_list.extend;
name_list(counter) := n.name;
dbms_output.put_line('Customer(' ||counter|| ')'||name_list(counter));
END LOOP;
END listCustomer;

END c_package;
/

```

The above example makes use of the **nested table**. We will discuss the concept of nested table in the next chapter.

When the above code is executed at the SQL prompt, it produces the following result –

```
Package body created.
```

Using The Package

The following program uses the methods declared and defined in the package *c_package*.

```

DECLARE
code customers.id%type:= 8;
BEGIN
c_package.addcustomer(7, 'Rajnish', 25, 'Chennai', 3500);
c_package.addcustomer(8, 'Subham', 32, 'Delhi', 7500);
c_package.listcustomer;
c_package.delcustomer(code);
c_package.listcustomer;
END;
/

```

When the above code is executed at the SQL prompt, it produces the following result –

```
Customer(1): Ramesh
Customer(2): Khilan
```

Customer(3): kaushik
 Customer(4): Chaitali
 Customer(5): Hardik
 Customer(6): Komal
 Customer(7): Rajnish
 Customer(8): Subham
 Customer(1): Ramesh
 Customer(2): Khilan
 Customer(3): kaushik
 Customer(4): Chaitali
 Customer(5): Hardik
 Customer(6): Komal
 Customer(7): Rajnish

PL/SQL procedure successfully completed

PL/SQL - Collections

In this chapter, we will discuss the Collections in PL/SQL. A collection is an ordered group of elements having the same data type. Each element is identified by a unique subscript that represents its position in the collection.

PL/SQL provides three collection types –

- Index-by tables or Associative array
- Nested table
- Variable-size array or Varray

Oracle documentation provides the following characteristics for each type of collections –

Collection Type	Number of Elements	Subscript Type	Dense or Sparse	Where Created	Can Be Object Type Attribute
Associative array (or index-by table)	Unbounded	String or integer	Either	Only in PL/SQL block	No
Nested table	Unbounded	Integer	Starts dense, can become sparse	Either in PL/SQL block or at schema level	Yes
Variable-size array (Varray)	Bounded	Integer	Always dense	Either in PL/SQL block or at schema level	Yes

We have already discussed varray in the chapter '**PL/SQL arrays**'. In this chapter, we will discuss the PL/SQL tables.

Both types of PL/SQL tables, i.e., the index-by tables and the nested tables have the same structure and their rows are accessed using the subscript notation. However, these two types of tables differ in one aspect; the nested tables can be stored in a database column and the index-by tables cannot.

Index-By Table

An **index-by** table (also called an **associative array**) is a set of **key-value** pairs. Each key is unique and is used to locate the corresponding value. The key can be either an integer or a string. An index-by table is created using the following syntax. Here, we are creating an **index-by** table named **table_name**, the keys of which will be of the *subscript_type* and associated values will be of the *element_type*

```
TYPE type_name IS TABLE OF element_type [NOT NULL] INDEX BY subscript_type;
```

```
table_name type_name;
```

Example

Following example shows how to create a table to store integer values along with names and later it prints the same list of names.

```
DECLARE
  TYPE salary IS TABLE OF NUMBER INDEX BY VARCHAR2(20);
  salary_list salary;
  name VARCHAR2(20);
BEGIN
  -- adding elements to the table
  salary_list('Rajnish') := 62000;
  salary_list('Minakshi') := 75000;
  salary_list('Martin') := 100000;
  salary_list('James') := 78000;

  -- printing the table
  name := salary_list.FIRST;
  WHILE name IS NOT null LOOP
    dbms_output.put_line
      ('Salary of ' || name || ' is ' || TO_CHAR(salary_list(name)));
    name := salary_list.NEXT(name);
  END LOOP;
END;
/
```

When the above code is executed at the SQL prompt, it produces the following result –

```
Salary of James is 78000
Salary of Martin is 100000
Salary of Minakshi is 75000
Salary of Rajnish is 62000
```

PL/SQL procedure successfully completed.

Example

Elements of an index-by table could also be a **%ROWTYPE** of any database table or **%TYPE** of any database table field. The following example illustrates the concept. We will use the **CUSTOMERS** table stored in our database as –

```
Select * from customers;
```

```
+-----+-----+-----+-----+-----+
```

```

| ID | NAME   | AGE | ADDRESS | SALARY |
+---+-----+----+-----+-----+
| 1 | Ramesh | 32 | Ahmedabad | 2000.00 |
| 2 | Khilan | 25 | Delhi    | 1500.00 |
| 3 | kaushik | 23 | Kota     | 2000.00 |
| 4 | Chaitali | 25 | Mumbai   | 6500.00 |
| 5 | Hardik | 27 | Bhopal   | 8500.00 |
| 6 | Komal  | 22 | MP       | 4500.00 |
+---+-----+----+-----+-----+

```

```

DECLARE
  CURSOR c_customers is
    select name from customers;

  TYPE c_list IS TABLE of customers.Name%type INDEX BY binary_integer;
  name_list c_list;
  counter integer :=0;
BEGIN
  FOR n IN c_customers LOOP
    counter := counter +1;
    name_list(counter) := n.name;
    dbms_output.put_line('Customer('||counter||'):'||name_list(counter));
  END LOOP;
END;
/

```

When the above code is executed at the SQL prompt, it produces the following result –

```

Customer(1): Ramesh
Customer(2): Khilan
Customer(3): kaushik
Customer(4): Chaitali
Customer(5): Hardik
Customer(6): Komal

```

PL/SQL procedure successfully completed

Nested Tables

A **nested table** is like a one-dimensional array with an arbitrary number of elements. However, a nested table differs from an array in the following aspects –

- An array has a declared number of elements, but a nested table does not. The size of a nested table can increase dynamically.
- An array is always dense, i.e., it always has consecutive subscripts. A nested array is dense initially, but it can become sparse when elements are deleted from it.

A nested table is created using the following syntax –

```

TYPE type_name IS TABLE OF element_type [NOT NULL];

table_name type_name;

```

This declaration is similar to the declaration of an **index-by** table, but there is no **INDEX BY** clause.

A nested table can be stored in a database column. It can further be used for simplifying SQL operations where you join a single-column table with a larger table. An associative array cannot be stored in the database.

Example

The following examples illustrate the use of nested table –

```

DECLARE
  TYPE names_table IS TABLE OF VARCHAR2(10);
  TYPE grades IS TABLE OF INTEGER;
  names names_table;
  marks grades;
  total integer;
BEGIN
  names := names_table('Kavita', 'Pritam', 'Ayan', 'Rishav', 'Aziz');
  marks:= grades(98, 97, 78, 87, 92);
  total := names.count;
  dbms_output.put_line('Total '|| total || ' Students');
  FOR i IN 1 .. total LOOP
    dbms_output.put_line('Student:'||names(i)||', Marks:' || marks(i));
  end loop;
END;
/

```

When the above code is executed at the SQL prompt, it produces the following result –

```

Total 5 Students
Student:Kavita, Marks:98
Student:Pritam, Marks:97
Student:Ayan, Marks:78
Student:Rishav, Marks:87
Student:Aziz, Marks:92

```

PL/SQL procedure successfully completed.

Example

Elements of a **nested table** can also be a **%ROWTYPE** of any database table or **%TYPE** of any database table field. The following example illustrates the concept. We will use the CUSTOMERS table stored in our database as –

```

Select * from customers;

+----+-----+-----+-----+-----+
| ID | NAME   | AGE | ADDRESS | SALARY |
+----+-----+-----+-----+-----+
| 1 | Ramesh | 32 | Ahmedabad | 2000.00 |
| 2 | Khilan | 25 | Delhi     | 1500.00 |
| 3 | kaushik | 23 | Kota      | 2000.00 |
| 4 | Chaitali | 25 | Mumbai   | 6500.00 |
| 5 | Hardik | 27 | Bhopal    | 8500.00 |
| 6 | Komal   | 22 | MP        | 4500.00 |
+----+-----+-----+-----+-----+
DECLARE

```

```

CURSOR c_customers is
  SELECT name FROM customers;
TYPE c_list IS TABLE of customerS.No.ame%type;
name_list c_list := c_list();
counter integer :=0;
BEGIN
  FOR n IN c_customers LOOP
    counter := counter +1;
    name_list.extend;
    name_list(counter) := n.name;
    dbms_output.put_line('Customer('||counter||'):'||name_list(counter));
  END LOOP;
END;
/

```

When the above code is executed at the SQL prompt, it produces the following result –

```

Customer(1): Ramesh
Customer(2): Khilan
Customer(3): kaushik
Customer(4): Chaitali
Customer(5): Hardik
Customer(6): Komal

```

PL/SQL procedure successfully completed.

Collection Methods

PL/SQL provides the built-in collection methods that make collections easier to use. The following table lists the methods and their purpose –

S.No	Method Name & Purpose
1	EXISTS(n) Returns TRUE if the nth element in a collection exists; otherwise returns FALSE.
2	COUNT Returns the number of elements that a collection currently contains.
3	LIMIT Checks the maximum size of a collection.
4	FIRST Returns the first (smallest) index numbers in a collection that uses the integer subscripts.
5	LAST Returns the last (largest) index numbers in a collection that uses the integer subscripts.
6	PRIOR(n) Returns the index number that precedes index n in a collection.

7	NEXT(n) Returns the index number that succeeds index n.
8	EXTEND Appends one null element to a collection.
9	EXTEND(n) Appends n null elements to a collection.
10	EXTEND(n,i) Appends n copies of the i th element to a collection.
11	TRIM Removes one element from the end of a collection.
12	TRIM(n) Removes n elements from the end of a collection.
13	DELETE Removes all elements from a collection, setting COUNT to 0.
14	DELETE(n) Removes the n th element from an associative array with a numeric key or a nested table. If the associative array has a string key, the element corresponding to the key value is deleted. If n is null, DELETE(n) does nothing.
15	DELETE(m,n) Removes all elements in the range m..n from an associative array or nested table. If m is larger than n or if m or n is null, DELETE(m,n) does nothing.

Collection Exceptions

The following table provides the collection exceptions and when they are raised –

Collection Exception	Raised in Situations
COLLECTION_IS_NULL	You try to operate on an atomically null collection.
NO_DATA_FOUND	A subscript designates an element that was deleted, or a nonexistent element of an associative array.
SUBSCRIPT_BEYOND_COUNT	A subscript exceeds the number of elements in a collection.
SUBSCRIPT_OUTSIDE_LIMIT	A subscript is outside the allowed range.
VALUE_ERROR	A subscript is null or not convertible to the key type. This exception might occur if the key is defined as a PLS_INTEGER range, and the subscript is outside this range.

PL/SQL - Transactions

In this chapter, we will discuss the transactions in PL/SQL. A database **transaction** is an atomic unit of work that may consist of one or more related SQL statements. It is called atomic because the database modifications brought about by the SQL statements that constitute a transaction can collectively be either committed, i.e., made permanent to the database or rolled back (undone) from the database.

A successfully executed SQL statement and a committed transaction are not same. Even if an SQL statement is executed successfully, unless the transaction containing the statement is committed, it can be rolled back and all changes made by the statement(s) can be undone.

Starting and Ending a Transaction

A transaction has a **beginning** and an **end**. A transaction starts when one of the following events take place –

- The first SQL statement is performed after connecting to the database.
- At each new SQL statement issued after a transaction is completed.

A transaction ends when one of the following events take place –

- A **COMMIT** or a **ROLLBACK** statement is issued.
- A **DDL** statement, such as **CREATE TABLE** statement, is issued; because in that case a **COMMIT** is automatically performed.
- A **DCL** statement, such as a **GRANT** statement, is issued; because in that case a **COMMIT** is automatically performed.
- User disconnects from the database.
- User exits from **SQL*PLUS** by issuing the **EXIT** command, a **COMMIT** is automatically performed.
- **SQL*Plus** terminates abnormally, a **ROLLBACK** is automatically performed.
- A **DML** statement fails; in that case a **ROLLBACK** is automatically performed for undoing that DML statement.

Committing a Transaction

A transaction is made permanent by issuing the SQL command **COMMIT**. The general syntax for the **COMMIT** command is –

```
COMMIT;
```

For example,

```
INSERT INTO CUSTOMERS (ID,NAME,AGE,ADDRESS,SALARY)
VALUES (1, 'Ramesh', 32, 'Ahmedabad', 2000.00 );
```

```
INSERT INTO CUSTOMERS (ID,NAME,AGE,ADDRESS,SALARY)
VALUES (2, 'Khilan', 25, 'Delhi', 1500.00 );
```

```
INSERT INTO CUSTOMERS (ID,NAME,AGE,ADDRESS,SALARY)
VALUES (3, 'kaushik', 23, 'Kota', 2000.00 );
```

```
INSERT INTO CUSTOMERS (ID,NAME,AGE,ADDRESS,SALARY)
VALUES (4, 'Chaitali', 25, 'Mumbai', 6500.00 );
```

```
INSERT INTO CUSTOMERS (ID,NAME,AGE,ADDRESS,SALARY)
VALUES (5, 'Hardik', 27, 'Bhopal', 8500.00 );
```

```
INSERT INTO CUSTOMERS (ID,NAME,AGE,ADDRESS,SALARY)
```

```
VALUES (6, 'Komal', 22, 'MP', 4500.00 );
```

```
COMMIT;
```

Rolling Back Transactions

Changes made to the database without COMMIT could be undone using the ROLLBACK command.

The general syntax for the ROLLBACK command is –

```
ROLLBACK [TO SAVEPOINT < savepoint_name>];
```

When a transaction is aborted due to some unprecedented situation, like system failure, the entire transaction since a commit is automatically rolled back. If you are not using **savepoint**, then simply use the following statement to rollback all the changes –

```
ROLLBACK;
```

Savepoints

Savepoints are sort of markers that help in splitting a long transaction into smaller units by setting some checkpoints. By setting savepoints within a long transaction, you can roll back to a checkpoint if required. This is done by issuing the **SAVEPOINT** command.

The general syntax for the SAVEPOINT command is –

```
SAVEPOINT < savepoint_name >;
```

For example

```
INSERT INTO CUSTOMERS (ID,NAME,AGE,ADDRESS,SALARY)
VALUES (7, 'Rajnish', 27, 'HP', 9500.00 );
```

```
INSERT INTO CUSTOMERS (ID,NAME,AGE,ADDRESS,SALARY)
VALUES (8, 'Riddhi', 21, 'WB', 4500.00 );
SAVEPOINT sav1;
```

```
UPDATE CUSTOMERS
SET SALARY = SALARY + 1000;
ROLLBACK TO sav1;
```

```
UPDATE CUSTOMERS
SET SALARY = SALARY + 1000
WHERE ID = 7;
UPDATE CUSTOMERS
SET SALARY = SALARY + 1000
WHERE ID = 8;
```

```
COMMIT;
```

ROLLBACK TO sav1 – This statement rolls back all the changes up to the point, where you had marked savepoint sav1.

After that, the new changes that you make will start.

Automatic Transaction Control

To execute a **COMMIT** automatically whenever an **INSERT**, **UPDATE** or **DELETE** command is executed, you can set the **AUTOCOMMIT** environment variable as –

```
SET AUTOCOMMIT ON;
```

You can turn-off the auto commit mode using the following command –

```
SET AUTOCOMMIT OFF;
```

PL/SQL - Date & Time

In this chapter, we will discuss the Date and Time in PL/SQL. There are two classes of date and time related data types in PL/SQL –

- Datetime data types
- Interval data types

The Datetime data types are –

- DATE
- TIMESTAMP
- TIMESTAMP WITH TIME ZONE
- TIMESTAMP WITH LOCAL TIME ZONE

The Interval data types are –

- INTERVAL YEAR TO MONTH
- INTERVAL DAY TO SECOND

Field Values for Datetime and Interval Data Types

Both **datetime** and **interval** data types consist of **fields**. The values of these fields determine the value of the data type. The following table lists the fields and their possible values for datetimes and intervals.

Field Name	Valid Datetime Values	Valid Interval Values
YEAR	-4712 to 9999 (excluding year 0)	Any nonzero integer
MONTH	01 to 12	0 to 11
DAY	01 to 31 (limited by the values of MONTH and YEAR, according to the rules of the calendar for the locale)	Any nonzero integer
HOUR	00 to 23	0 to 23
MINUTE	00 to 59	0 to 59
SECOND	00 to 59.9(n), where 9(n) is the precision of time fractional seconds The 9(n) portion is not applicable for DATE.	0 to 59.9(n), where 9(n) is the precision of interval fractional seconds
TIMEZONE_HOUR	-12 to 14 (range accommodates daylight savings time changes) Not applicable for DATE or TIMESTAMP.	Not applicable
TIMEZONE_MINUTE	00 to 59 Not applicable for DATE or TIMESTAMP.	Not applicable

TIMEZONE_REGION	Not applicable for DATE or TIMESTAMP.	Not applicable
TIMEZONE_ABBR	Not applicable for DATE or TIMESTAMP.	Not applicable

The Datetime Data Types and Functions

Following are the Datetime data types –

DATE

It stores date and time information in both character and number datatypes. It is made of information on century, year, month, date, hour, minute, and second. It is specified as –

TIMESTAMP

It is an extension of the DATE data type. It stores the year, month, and day of the DATE datatype, along with hour, minute, and second values. It is useful for storing precise time values.

TIMESTAMP WITH TIME ZONE

It is a variant of TIMESTAMP that includes a time zone region name or a time zone offset in its value. The time zone offset is the difference (in hours and minutes) between local time and UTC. This data type is useful for collecting and evaluating date information across geographic regions.

TIMESTAMP WITH LOCAL TIME ZONE

It is another variant of TIMESTAMP that includes a time zone offset in its value.

Following table provides the Datetime functions (where, x has the datetime value) –

S.No	Function Name & Description
1	ADD_MONTHS(x, y); Adds y months to x.
2	LAST_DAY(x); Returns the last day of the month.
3	MONTHS_BETWEEN(x, y); Returns the number of months between x and y.
4	NEXT_DAY(x, day); Returns the datetime of the next <i>day</i> after x.
5	NEW_TIME; Returns the time/day value from a time zone specified by the user.
6	ROUND(x [, unit]); Rounds x.
7	SYSDATE(); Returns the current datetime.
8	TRUNC(x [, unit]); Truncates x.

Timestamp functions (where, x has a timestamp value) –

S.No	Function Name & Description
1	CURRENT_TIMESTAMP(); Returns a TIMESTAMP WITH TIME ZONE containing the current session time along with the session time zone.
2	EXTRACT({ YEAR MONTH DAY HOUR MINUTE SECOND } { TIMEZONE_HOUR TIMEZONE_MINUTE } { TIMEZONE_REGION } TIMEZONE_ABBR) FROM x) Extracts and returns a year, month, day, hour, minute, second, or time zone from x .
3	FROM_TZ(x, time_zone); Converts the TIMESTAMP x and the time zone specified by time_zone to a TIMESTAMP WITH TIMEZONE .
4	LOCALTIMESTAMP(); Returns a TIMESTAMP containing the local time in the session time zone.
5	SYSTIMESTAMP(); Returns a TIMESTAMP WITH TIME ZONE containing the current database time along with the database time zone.
6	SYS_EXTRACT_UTC(x); Converts the TIMESTAMP WITH TIMEZONE x to a TIMESTAMP containing the date and time in UTC.
7	TO_TIMESTAMP(x, [format]); Converts the string x to a TIMESTAMP .
8	TO_TIMESTAMP_TZ(x, [format]); Converts the string x to a TIMESTAMP WITH TIMEZONE .

Examples

The following code snippets illustrate the use of the above functions –

Example 1

```
SELECT SYSDATE FROM DUAL;
```

Output –

```
08/31/2012 5:25:34 PM
```

Example 2

```
SELECT TO_CHAR(CURRENT_DATE, 'DD-MM-YYYY HH:MI:SS') FROM DUAL;
```

Output –

```
31-08-2012 05:26:14
```

Example 3

```
SELECT ADD_MONTHS(SYSDATE, 5) FROM DUAL;
```

Output –

01/31/2013 5:26:31 PM

Example 4

```
SELECT LOCALTIMESTAMP FROM DUAL;
```

Output –

8/31/2012 5:26:55.347000 PM

The Interval Data Types and Functions

Following are the Interval data types –

- **IINTERVAL YEAR TO MONTH** – It stores a period of time using the YEAR and MONTH datetime fields.
- **INTERVAL DAY TO SECOND** – It stores a period of time in terms of days, hours, minutes, and seconds.

Interval Functions

S.No	Function Name & Description
1	NUMTODSINTERVAL(x, interval_unit); Converts the number x to an INTERVAL DAY TO SECOND.
2	NUMTOYMINTERVAL(x, interval_unit); Converts the number x to an INTERVAL YEAR TO MONTH.
3	TO_DSINTERVAL(x); Converts the string x to an INTERVAL DAY TO SECOND.
4	TO_YMINTERVAL(x); Converts the string x to an INTERVAL YEAR TO MONTH.

PL/SQL - DBMS Output

In this chapter, we will discuss the DBMS Output in PL/SQL. The **DBMS_OUTPUT** is a built-in package that enables you to display output, debugging information, and send messages from PL/SQL blocks, subprograms, packages, and triggers. We have already used this package throughout our tutorial.

Let us look at a small code snippet that will display all the user tables in the database. Try it in your database to list down all the table names –

```
BEGIN
  dbms_output.put_line (user || ' Tables in the database:');
  FOR t IN (SELECT table_name FROM user_tables)
  LOOP
    dbms_output.put_line(t.table_name);
  END LOOP;
END;
/
```

DBMS_OUTPUT Subprograms

The DBMS_OUTPUT package has the following subprograms –

S.No	Subprogram & Purpose
------	----------------------

1	DBMS_OUTPUT.DISABLE; Disables message output.
2	DBMS_OUTPUT.ENABLE(buffer_size IN INTEGER DEFAULT 20000); Enables message output. A NULL value of buffer_size represents unlimited buffer size.
3	DBMS_OUTPUT.GET_LINE (line OUT VARCHAR2, status OUT INTEGER); Retrieves a single line of buffered information.
4	DBMS_OUTPUT.GET_LINES (lines OUT CHARARR, numlines IN OUT INTEGER); Retrieves an array of lines from the buffer.
5	DBMS_OUTPUT.NEW_LINE; Puts an end-of-line marker.
6	DBMS_OUTPUT.PUT(item IN VARCHAR2); Places a partial line in the buffer.
7	DBMS_OUTPUT.PUT_LINE(item IN VARCHAR2); Places a line in the buffer.

Example

```

DECLARE
  lines dbms_output.chararr;
  num_lines number;
BEGIN
  -- enable the buffer with default size 20000
  dbms_output.enable;

  dbms_output.put_line('Hello Reader!');
  dbms_output.put_line('Hope you have enjoyed the tutorials!');
  dbms_output.put_line('Have a great time exploring pl/sql!');

  num_lines := 3;

  dbms_output.get_lines(lines, num_lines);

  FOR i IN 1..num_lines LOOP
    dbms_output.put_line(lines(i));
  END LOOP;
END;
/

```

When the above code is executed at the SQL prompt, it produces the following result –

```

Hello Reader!
Hope you have enjoyed the tutorials!

```

Have a great time exploring pl/sql!

PL/SQL procedure successfully completed.

PL/SQL - Object Oriented

In this chapter, we will discuss Object-Oriented PL/SQL. PL/SQL allows defining an object type, which helps in designing object-oriented database in Oracle. An object type allows you to create composite types. Using objects allow you to implement real world objects with specific structure of data and methods for operating it. Objects have attributes and methods. Attributes are properties of an object and are used for storing an object's state; and methods are used for modeling its behavior.

Objects are created using the CREATE [OR REPLACE] TYPE statement. Following is an example to create a simple **address** object consisting of few attributes –

```
CREATE OR REPLACE TYPE address AS OBJECT
(house_no varchar2(10),
street varchar2(30),
city varchar2(20),
state varchar2(10),
pincode varchar2(10)
);
/
```

When the above code is executed at the SQL prompt, it produces the following result –

Type created.

Let's create one more object **customer** where we will wrap **attributes** and **methods** together to have object-oriented feeling –

```
CREATE OR REPLACE TYPE customer AS OBJECT
(code number(5),
name varchar2(30),
contact_no varchar2(12),
addr address,
member procedure display
);
/
```

When the above code is executed at the SQL prompt, it produces the following result –

Type created.

Instantiating an Object

Defining an object type provides a blueprint for the object. To use this object, you need to create instances of this object. You can access the attributes and methods of the object using the instance name and **the access operator** (.) as follows –

```
DECLARE
    residence address;
BEGIN
    residence := address('103A', 'M.G.Road', 'Jaipur', 'Rajasthan', '201301');
    dbms_output.put_line('House No: ' || residence.house_no);
    dbms_output.put_line('Street: ' || residence.street);
    dbms_output.put_line('City: ' || residence.city);
```

```
dbms_output.put_line('State: '|| residence.state);
dbms_output.put_line('Pincode: '|| residence.pincode);
END;
/
```

When the above code is executed at the SQL prompt, it produces the following result –

```
House No: 103A
Street: M.G.Road
City: Jaipur
State: Rajasthan
Pincode: 201301
```

PL/SQL procedure successfully completed.

Member Methods

Member methods are used for manipulating the **attributes** of the object. You provide the declaration of a member method while declaring the object type. The object body defines the code for the member methods. The object body is created using the CREATE TYPE BODY statement.

Constructors are functions that return a new object as its value. Every object has a system defined constructor method. The name of the constructor is same as the object type. For example –

```
residence := address('103A', 'M.G.Road', 'Jaipur', 'Rajasthan','201301');
```

The **comparison methods** are used for comparing objects. There are two ways to compare objects –

Map method

The **Map method** is a function implemented in such a way that its value depends upon the value of the attributes. For example, for a customer object, if the customer code is same for two customers, both customers could be the same. So the relationship between these two objects would depend upon the value of code.

Order method

The **Order method** implements some internal logic for comparing two objects. For example, for a rectangle object, a rectangle is bigger than another rectangle if both its sides are bigger.

Using Map method

Let us try to understand the above concepts using the following rectangle object –

```
CREATE OR REPLACE TYPE rectangle AS OBJECT
(length number,
width number,
member function enlarge( inc number) return rectangle,
member procedure display,
map member function measure return number
);
/
```

When the above code is executed at the SQL prompt, it produces the following result –

Type created.

Creating the type body –

```
CREATE OR REPLACE TYPE BODY rectangle AS
MEMBER FUNCTION enlarge(inc number) return rectangle IS
```

```

BEGIN
    return rectangle(self.length + inc, self.width + inc);
END enlarge;
MEMBER PROCEDURE display IS
BEGIN
    dbms_output.put_line('Length: ' || length);
    dbms_output.put_line('Width: ' || width);
END display;
MAP MEMBER FUNCTION measure return number IS
BEGIN
    return (sqrt(length*length + width*width));
END measure;
END;
/

```

When the above code is executed at the SQL prompt, it produces the following result –

```
Type body created.
```

Now using the rectangle object and its member functions –

```

DECLARE
    r1 rectangle;
    r2 rectangle;
    r3 rectangle;
    inc_factor number := 5;
BEGIN
    r1 := rectangle(3, 4);
    r2 := rectangle(5, 7);
    r3 := r1.enlarge(inc_factor);
    r3.display;
    IF (r1 > r2) THEN -- calling measure function
        r1.display;
    ELSE
        r2.display;
    END IF;
END;
/

```

When the above code is executed at the SQL prompt, it produces the following result –

```

Length: 8
Width: 9
Length: 5
Width: 7

```

```
PL/SQL procedure successfully completed.
```

Using Order method

Now, the **same effect could be achieved using an order method**. Let us recreate the rectangle object using an order method –

```

CREATE OR REPLACE TYPE rectangle AS OBJECT
(length number,

```

```

width number,
member procedure display,
order member function measure(r rectangle) return number
);
/

```

When the above code is executed at the SQL prompt, it produces the following result –

Type created.

Creating the type body –

```

CREATE OR REPLACE TYPE BODY rectangle AS
MEMBER PROCEDURE display IS
BEGIN
    dbms_output.put_line('Length: '|| length);
    dbms_output.put_line('Width: '|| width);
END display;
ORDER MEMBER FUNCTION measure(r rectangle) return number IS
BEGIN
    IF(sqrt(self.length*self.length + self.width*self.width)>
    sqrt(r.length*r.length + r.width*r.width)) then
        return(1);
    ELSE
        return(-1);
    END IF;
END measure;
END;
/

```

When the above code is executed at the SQL prompt, it produces the following result –

Type body created.

Using the rectangle object and its member functions –

```

DECLARE
    r1 rectangle;
    r2 rectangle;
BEGIN
    r1 := rectangle(23, 44);
    r2 := rectangle(15, 17);
    r1.display;
    r2.display;
    IF (r1 > r2) THEN -- calling measure function
        r1.display;
    ELSE
        r2.display;
    END IF;
END;
/

```

When the above code is executed at the SQL prompt, it produces the following result –

Length: 23

Width: 44
Length: 15
Width: 17
Length: 23
Width: 44

PL/SQL procedure successfully completed.

Inheritance for PL/SQL Objects

PL/SQL allows creating object from the existing base objects. To implement inheritance, the base objects should be declared as **NOT FINAL**. The default is **FINAL**.

The following programs illustrate the inheritance in PL/SQL Objects. Let us create another object named **TableTop**, this is inherited from the Rectangle object. For this, we need to create the base *rectangle* object –

```
CREATE OR REPLACE TYPE rectangle AS OBJECT
(length number,
width number,
member function enlarge( inc number) return rectangle,
NOT FINAL member procedure display) NOT FINAL
/
```

When the above code is executed at the SQL prompt, it produces the following result –

Type created.

Creating the base type body –

```
CREATE OR REPLACE TYPE BODY rectangle AS
MEMBER FUNCTION enlarge(inc number) return rectangle IS
BEGIN
return rectangle(self.length + inc, self.width + inc);
END enlarge;
MEMBER PROCEDURE display IS
BEGIN
dbms_output.put_line('Length: '|| length);
dbms_output.put_line('Width: '|| width);
END display;
END;
/
```

When the above code is executed at the SQL prompt, it produces the following result –

Type body created.

Creating the child object *tabletop* –

```
CREATE OR REPLACE TYPE tabletop UNDER rectangle
(
material varchar2(20),
OVERRIDING member procedure display
)
/
```

When the above code is executed at the SQL prompt, it produces the following result –

Type created.

Creating the type body for the child object *tabletop*

```
CREATE OR REPLACE TYPE BODY tabletop AS
OVERRIDING MEMBER PROCEDURE display IS
BEGIN
  dbms_output.put_line('Length: ' || length);
  dbms_output.put_line('Width: ' || width);
  dbms_output.put_line('Material: ' || material);
END display;
/
```

When the above code is executed at the SQL prompt, it produces the following result –

Type body created.

Using the *tabletop* object and its member functions –

```
DECLARE
  t1 tabletop;
  t2 tabletop;
BEGIN
  t1:= tabletop(20, 10, 'Wood');
  t2 := tabletop(50, 30, 'Steel');
  t1.display;
  t2.display;
END;
/
```

When the above code is executed at the SQL prompt, it produces the following result –

```
Length: 20
Width: 10
Material: Wood
Length: 50
Width: 30
Material: Steel
```

PL/SQL procedure successfully completed.

Abstract Objects in PL/SQL

The **NOT INSTANTIABLE** clause allows you to declare an abstract object. You cannot use an abstract object as it is; you will have to create a subtype or child type of such objects to use its functionalities.

For example,

```
CREATE OR REPLACE TYPE rectangle AS OBJECT
(length number,
width number,
NOT INSTANTIABLE NOT FINAL MEMBER PROCEDURE display)
```



```
NOT INSTANTIABLE NOT FINAL
```

```
/
```

When the above code is executed at the SQL prompt, it produces the following result –

```
Type created.
```

CHAPTER 2

EXAMPLE QUESTIONS

1. a. Consider the insurance database given below.

```
PERSON(driver_id, name, address) CAR(regno,  
model,year )  
ACCIDENT(report_number,accd_date,location)  
OWNS(driver_id,regno)  
PARTICIPATED(driver_id,regno,report_number,damage_amount)
```

- i. Create the above tables by properly specifying the primary keys and foreign keys and enter at least five tuples for each relation.
 - ii. Update the damage amount for the car with specific regno in the accident with report number 12 to 25000.
 - iii. Add a new accident to the database.
 - iv. Find the total number of people who owned cars that were involved in accidents in the year 2008.
 - v. Find the number of accidents in which cars belonging to a specific model were involved.
- b. Write a PL/SQL to find and display the sum of first n natural numbers.

2. a. Consider the following employee and department tables.

```
EMPLOYEE(empno, ename, designation, manager, hiredate, salary, commission, deptno)  
DEPARTMENT(deptno, dname, location)
```

- i. Create the above tables by properly specifying the primary keys and foreign keys and enter at least five tuples for each relation.
 - ii. List the names of employees whose name contain substring 'LA'.
 - iii. List the details of employees of salary are greater than or equal to the average salary of employee table.
 - iv. Create a view which consists of details of all 'SALESMAN'.
- b. i. Write a PL/SQL to display the empno,job,salary of all employees in employee table.
 - ii. Write a trigger to ensure that empno in employee table is maintained as primary key.

3. a. Consider the following tables.

```
SAILOR(sid, sname, rating, age)  
BOATS(bid, bname, colour)  
RESERVES(sid, bid, day)
```

- i. Create the above tables by properly specifying the primary keys and foreign keys and enter at

least five tuples for each relation.

- ii. List the sailors in the descending order of their rating.
 - iii. List the sailors whose youngest sailor for each rating and who can vote.
 - iv. List the sailors who have reserved for both 'RED' and 'GREEN' boats.
 - v. List the details of the oldest sailor for each rating level.
- b. Write a PL/SQL to find the factorial of a number.

4. a. Consider the following relations for order processing database application in a company.

CUSTOMER(custno, cname, city)
ORDER(orderno, odate, custno, ord_amt)
ORDER_ITEM(orderno, itemno, quantity)
ITEM(itemno, unitprice)
SHIPMENT(orderno, warehouseno, ship_date)
WAREHOUSE(warehouseno, city)

- i. Create the above tables by properly specifying the primary keys and foreign keys and enter at least five tuples for each relation.
- ii. Produce a listing: custname , No_of_orders , Avg_order_amount , where the middle column is the total number of orders by the customer and the last column is the average order amount for that customer.
- iii. List the orderno for orders that were shipped from *all* the warehouses that the company has in a specific city.
- iv. Demonstrate the deletion of an item from the ITEM table and demonstrate a method of handling the rows in the ORDER_ITEM table that contains this particular item.

Write a PL/SQL to handle 'no data found' predefined exception.

- ii. Write a PL/SQL to generate Fibonacci series.

5. a. Consider the following employee and department tables.

EMPLOYEE(empno, ename, designation, manager, hiredate, salary, commission, deptno)
DEPARTMENT(deptno, dname, location)

i. Create the above tables by properly specifying the primary keys and foreign keys and enter at least five tuples for each relation.

- ii.. List the different job titles of employee table.
- iii. List the details of employees of with minimum salary of employee table.

b. Develop an application for inventory control system.

6. a. Consider the following database of student enrollment in courses and books adopted for that course.

STUDENT(regno, name, major, bdate)
COURSE(courseno, cname, dept) ENROLL(regno,
courseno, sem, marks) BOOK_ADOPTION(courseno,
sem, book_isbn) TEXT(book_isbn,book_title,publisher,
author)

- i. Create the above tables by properly specifying the primary keys and foreign keys and enter at least five tuples for each relation.
- ii. Add a new text book to the database and make this book to be adopted by some department.
- iii. Produce a list of text books (includes courseno , book_isbn , book_title) in the alphabetical order for courses offered by the 'CS' department that use more than two books.
- iv. List any department that has *all* its books published by a specific publisher.

b. i. Write a PL/SQL to find topper among 'n' students.

ii. Write a trigger to avoid the entry of age less than 25.

7. a. Consider the following employee and department tables.

EMPLOYEE(empno, ename, designation, manager, hiredate, salary, commission, deptno)
DEPARTMENT(deptno, dname, location)

- i. Create the above tables by properly specifying the primary keys and foreign keys and enter at least five tuples for each relation.
- ii. List the employees of employee table in descending order of their salaries.
- iii. List the details of highest paid employee in 'SALES' department.

b. Develop an application for hospital management systems.

8. a. The following are maintained by a book dealer.

AUTHOR(author_id, name, city, country)
PUBLISHER(publisher_id, name, city, country)
CATALOG(book_id, title, author_id, publisher_id , category_id, year, price) CATEGORY(category_id,
description)
ORDER_DETAILS(order_no, book_id, quantity)

- i. Create the above tables by properly specifying the primary keys and foreign keys and enter at least five tuples for each relation. Give the details of the authors who have 2 or more books in the catalog and the price of the books is greater than the average price of the books in the catalog and the year of publication is after 2000.

- ii. Find the author of the book that has maximum sales.
- iii. Demonstrate how you increase the price of books published by a specific publisher by 10%.

Write a PL/SQL to find total marks for n students.

- ii. Write a trigger to avoid transaction during Monday and Thursday.

9. a. Consider the following tables.

SAILOR(sid, sname, rating, age)
 BOATS(bid, bname, colour)
 RESERVES(sid, bid, day)

- i. Create the above tables by properly specifying the primary keys and foreign keys and enter at least five tuples for each relation.
- ii. List the sailors who have sailed atleast 2 boats on the same day.
- iii. List the sailors who have reserved for all the boats.

b. Develop an application for railway reservation system.

10. a. Consider the following database for a banking enterprise.

BRANCH(branch_name, branch_city, assets) ACCOUNT(accno, branch_name, balance)
 DEPOSITOR(customer_name, accno)
 CUSTOMER(customer_name, customer_street, customer_city)
 LOAN(loan_number, branch_name, amount) BORROWER(customer_name, loan_number)

- i. Create the above tables by properly specifying the primary keys and foreign keys and enter at least five tuples for each relation. (25)
- ii. Find **all** the customers who have at least two accounts at the **main** branch. (10)
- iii. Find all the customers who have an account at **all** the branches located in a specific city. (15)
- iv. Demonstrate how you delete all account tuples at every branch located in a specific city. (10)

Write a PL/SQL to handle 'zero divide' predefined exception. (20)

- ii. Write a PL/SQL to check the given number is Armstrong number or not. (20)

11. a. Consider the following employee and department tables.

EMPLOYEE(empno, ename, designation, manager, hiredate, salary, commission, deptno)
DEPARTMENT(deptno, dname, location)

- i. Create the above tables by properly specifying the primary keys and foreign keys and enter at least five tuples for each relation. (25)
 - ii. List the employees who joined before 1981. (10)
 - iii. List the total information of employee table along with dname and location of all employees working under 'Accounting' and 'Research' in the descending order of deptno. (15)
- b. Develop an application for personal information system. (50)

12. b. Consider the following database for a banking enterprise.

CUSTOMER_FIXED_DEPOSIT(cust_id, last_name, mid_name, first_name,
fixed_deposit_no, amount, rate_of_interest)
CUSTOMER_LOAN(loan_no, cust_id, amount) CUSTOMER_DETAILS(cust_id, acc_type
)

- i. Create the above tables by properly specifying the primary keys and foreign keys and enter at least five tuples for each relation. (25)
- ii. List customer names of all customer who have taken a loan > 3,00,000. (10)
- iii. List customer names of all customer who have the same account type as customer 'jones simon'. (15)
- iv. List customer names of all customer who do not have a fixed deposit. (10)

Write a PL/SQL to handle 'Too many rows' predefined exception. (20)

- ii. Write a PL/SQL to find factorial of n number. (20)

13. a. Consider the following employee and department tables.

EMPLOYEE(empno, ename, designation, manager, hiredate, salary, commission, deptno)
DEPARTMENT(deptno, dname, location)

- i. Create the above tables by properly specifying the primary keys and foreign keys and enter at least five tuples for each relation. (25)
 - ii. List the max, min, avg salaries of each department. (10)
 - iii. List the details of manager who has maximum number of employees working under him. (15)
- b. Develop an application for timetable management system. (50)

14. a. Consider the following databases.

CUSTOMER(custno, custname, city, phone)
ITEM(itemno, itemname, itemprice,
quantity) INVOICE(invno, invdate, custno)
INVITEM(invno, itemno, quantity)

- i. Create the above tables by properly specifying the primary keys and foreign keys and enter at least five tuples for each relation. (25)
- ii. Display all item name along with the quantity sold. (10)
- iii. Display item name and price as single column like “<item> price is <price>” (10)
- iv. Display invoices, customer name and item names together (use join). (15)
- v. Find the customers who are not from “Chennai” (use set operator). (15) b. Write a

15. a. Consider the following employee and department tables.

EMPLOYEE(empno, ename, designation, manager, hiredate, salary, commission,
deptno)
DEPARTMENT(deptno, dname, location)

- i. Create the above tables by properly specifying the primary keys and foreign keys and enter at least five tuples for each relation. (25)
 - ii. Count the different job titles in employee table. (10)
 - iii. List the details of employees who are acting as managers to other employees. (15)
- b. Develop an application for hotel management system. (50)

16. a. Consider the following database for a banking enterprise.

BRANCH(branch_name, branch_city, assets) ACCOUNT(accno,
branch_name, balance) DEPOSITOR(customer_name, accno)
CUSTOMER(customer_name, customer_street, customer_city)
LOAN(loan_number, branch_name, amount)
BORROWER(customer_name, loan_number)

- i. Create the above tables by properly specifying the primary keys and foreign keys and enter at least five tuples for each relation. (25)
- ii. Display all the customers who were depositor and borrower. (10)
- iii. Display all the customer name who are only depositor. (10)
- iv. Display all branch name whose assets are greater than assets of branches located in “Coimbatore” city. (15)

Write a PL/SQL to handle user defined exception. (20)

ii. Write a PL/SQL to find the sum of the first n natural numbers. (20)

17. a. Consider the employee databases.

EMPLOYEE(empname, street, city)
WORKS(empname, companyname, salary)
COMPANY(companyname, city)
Manages(empname, managername)

i. Create the above tables by properly specifying the primary keys and foreign keys and enter at least five tuples for each relation. (25)

ii. Find the names of all employees work for 'First bank corporation'. (10)

iii. Find the names,street addresses and cities of residence of all employees who work for 'First bank corporation' and earn more than 200000 per annum. (15)

iv. Find the names of all employees in this database who live in the same city as the companies for which they work. (15)

v. Find the names of all the employees who earn more than every employees of 'small bank corporation'. (10)

b. Write a PL/SQL to calculate Electricity bill using function. (25)

18. a. Consider the following employee and department tables.

EMPLOYEE(empno, ename, designation, manager, hiredate, salary, commission, deptno)
DEPARTMENT(deptno, dname, location)

i. Create the above tables by properly specifying the primary keys and foreign keys and Enter at least five tuples for each relation. (25)

ii. List the employees who annual salary is between 22000 and 25000 (10)

iii. List the employees names along with their manager names. (10)

iv. List the dept who employees maximum no of 'CLERK's. (15)

b.i. Write a procedure to update the salaries by given amount. (20)

ii. Write a trigger to ensure that salary of an employee is always greater than the commission. (20)

19. a. Consider the following company database.

EMPLOYEE(eno, name, dob, doj, designation, basicpay, deptno)
DEPARTMENT(deptno, name)

PROJECT(projno, name,
deptno) WORKSFOR(eno,
projno, hours)

- i. Create the above tables by properly specifying the primary keys and foreign keys and enter at least five tuples for each relation. (25)
 - ii. List the department number and the number of employees in each department. (10)
 - iii. List the details of employees who have worked in more than three projects on a day. (15)
 - iv. Develop a view that will keep track of the department number, the number of employees in the department and the total basic pay expenditure for each department. (10)
- b.i. Write a PL/SQL to handle 'Too many rows' predefined exception. (20)
- ii. Write a PL/SQL to check whether the given number is Armstrong number or not. (20)

20. a. Consider the following employee and department tables.

EMPLOYEE(empno, ename, designation, manager, hiredate, salary, commission,
deptno)
DEPARTMENT(deptno, dname, location)

- i. Create the above tables by properly specifying the primary keys and foreign keys and enter at least five tuples for each relation. (25)
 - ii. List the employees whose salary is greater than at least one of the employees of deptno 30 (10)
 - iii. List the name, job, salary of employees in the department with the highest average salary.
 - iv. List the employees who are working either as manager or analyst with salary ranging from 2000 and 5000 (10)
- b. i. Write a procedure to update the salaries in given department by 2000 (20)
- ii. Write a trigger to ensure that no DML operations are allowed on employee table. (20)

CHAPTER 3

PRACTICAL EXERCISES

EX: NO: 1

STUDY OF BASIC SQL COMMANDS

AIM

To execute and verify the Basic SQL commands.

PROCEDURE

STEP 1: Start

STEP 2: Create the table with its essential attributes.

STEP 3: Insert attribute values into the table

STEP 4: Execute different Commands and extract information from the table.

STEP 5: Stop

SQL COMMANDS

1. COMMAND NAME: **CREATE**

COMMAND DESCRIPTION: **CREATE** command is used to create objects in database.

2. COMMAND NAME: **INSERT**

COMMAND DESCRIPTION: **INSERT** command is used to insert the values to the table.

3. COMMAND NAME: **SELECT**

COMMAND DESCRIPTION: **SELECT** command is used to display the table & table values.

4. COMMAND NAME: **ALTER**

COMMAND DESCRIPTION: **ALTER** command is used to alter the structure of database.

5. COMMAND NAME: **DROP**

COMMAND DESCRIPTION: **DROP** command is used to delete the object from database.

6. COMMAND NAME: **TRUNCATE**

COMMAND DESCRIPTION: **TRUNCATE** command is used to remove all the records in the table including the space allocated for the table.

7. COMMAND NAME: **COMMENT**

COMMAND DESCRIPTION: **COMMENT** command is used to add the comments to the table.

8. COMMAND NAME: **RENAME**

COMMAND DESCRIPTION: **RENAME** command is used to rename the objects.

9. COMMAND NAME: **UPDATE**

COMMAND DESCRIPTION: **UPDATE** command is used to update the values

10. COMMAND NAME: **DELETE**

COMMAND DESCRIPTION: **DELETE** command is used to delete the constraint from the table

11. COMMAND NAME: **GRANT**

COMMAND DESCRIPTION: **GRANT** command is used to give user's access privilege to database.

12. COMMAND NAME: **REVOKE**

COMMAND DESCRIPTION: **REVOKE** command is used to withdraw access privilege given with the grant.

TYPES OF COMMANDS

DDL (DATA DEFINITION LANGUAGE)

- ❖ CREATE
- ❖ ALTER
- ❖ DROP
- ❖ TRUNCATE
- ❖ COMMENT
- ❖ RENAME

DML (DATA MANIPULATION LANGUAGE)

- ❖ SELECT
- ❖ INSERT
- ❖ UPDATE
- ❖ DELETE

DCL (DATA CONTROL LANGUAGE)

- ❖ GRANT
- ❖ REVOKE

COMMANDS EXECUTION

CREATION OF TABLE WITHOUT PRIMARY KEY

```
SQL> create table employee ( Employee_name varchar2(10),employee_no number(8),  
dept_name varchar2(10),dept_no number (5),date_of_join date);
```

Table created.

TABLE DESCRIPTION

```
SQL> desc employee;
```

Name	Null?	Type
EMPLOYEE_NAME		VARCHAR2(10)
EMPLOYEE_NO		NUMBER(8)
DEPT_NAME		VARCHAR2(10)
DEPT_NO		NUMBER(5)
DATE_OF_JOIN		DATE

CREATION OF TABLE WITH PRIMARY KEY

```
SQL> create table employee1 (Employee_name varchar2(10),employee_no number(8)  
primary key, dept_name varchar2(10), dept_no number (5),date_of_join date);
```

Table created.

TABLE DESCRIPTION

```
SQL> desc employee1;
```

Name	Null?	Type
EMPLOYEE_NAME		VARCHAR2(10)
EMPLOYEE_NO	NOT NULL	NUMBER(8)
DEPT_NAME		VARCHAR2(10)
DEPT_NO		NUMBER(5)
DATE_OF_JOIN		DATE

INSERTION OF TABLE VALUES

```
SQL> insert into employee1 values ('Vijay',345,'CSE',21,'21-jun-2006');  
1 row created.
```

SQL> insert into employee1 values ('Raj',98,'IT',22,'30-sep-2006');

1 row created.

SQL> insert into employee1 values ('Giri',100,'CSE',67,'14-nov-1981');

1 row created.

SQL> insert into employee1
(Employee_name,employee_no,dept_name,dept_no,date_of_join)values('Vishva',128,
'ECE',87,'25-dec-2006');

1 row created.

SQL> insert into employee1 values ('Ravi',124,'ECE',89,'15-jun-2005');

1 row created.

SELECTION OR DISPLAY OF TABLE

SQL> select * from employee1;

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NAME	DEPT_NO	DATE_OF_J
Vijay	345	CSE	21	21-JUN-06
Raj	98	IT	22	30-SEP-06
Giri	100	CSE	67	14-NOV-81
Vishva	128	ECE	87	25-DEC-06
Ravi	124	ECE	89	15-JUN-05

UPDATE OF TABLE VALUES

SQL> update employee1 set employee_no=300 where dept_no=67;

1 row updated.

SQL> select * from employee1;

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NAME	DEPT_NO	DATE_OF_J
Vijay	345	CSE	21	21-JUN-06
Raj	98	IT	22	30-SEP-06
Giri	300	CSE	67	14-NOV-81

Vishva	128	ECE	87	25-DEC-06
Ravi	124	ECE	89	15-JUN-05

USING ALTER COMMANDS

SQL> select * from employee;

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NAME	DEPT_NO	DATE_OF_J
Karthik	98	ECE	35	14-FEB-05
Vijay	100	CSE	98	15-AUG-01
praveen	128	ECE	76	02-OCT-03

SQL> select * from employee1;

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NAME	DEPT_NO	DATE_OF_J
Raj	98	IT	22	30-SEP-06
Giri	100	CSE	67	14-NOV-81
Vishva	128	ECE	87	25-DEC-06

DROPPING PRIMARY KEY USING ALTER COMMAND

SQL> alter table employee1 drop primary key;

Table altered.

SQL> desc employee1;

Name	Null?	Type
EMPLOYEE_NAME		VARCHAR2(10)
EMPLOYEE_NO		NUMBER(8)
DEPT_NAME		VARCHAR2(10)
DEPT_NO		NUMBER(5)
DATE_OF_JOIN		DATE

CREATING PRIMARY KEY USING ALTER COMMAND

SQL> alter table employee1 add primary key (employee_no);

Table altered.

SQL> desc employee1;

Name	Null?	Type
------	-------	------

```

-----
EMPLOYEE_NAME          VARCHAR2(10)
EMPLOYEE_NO            NOT NULL    NUMBER(8)
DEPT_NAME              VARCHAR2(10)
DEPT_NO                NUMBER(5)
DATE_OF_JOIN           DATE

```

SQL> alter table employee add primary key (employee_no);

Table altered.

SQL> desc employee;

```

Name                    Null?                Type
-----
EMPLOYEE_NAME          VARCHAR2(10)
EMPLOYEE_NO            NOT NULL             NUMBER(8)
DEPT_NAME              VARCHAR2(10)
DEPT_NO                NUMBER(5)
DATE_OF_JOIN           DATE

```

CREATING FOREIGN KEY USING ALTER COMMAND

Note : For creation of foreign key, both the table should possess primary key with same attributes. Similarly for dropping employee 1 as well as employee table ,first the relationship i.e., primary key has to be removed from both the tables.

SQL> alter table employee1 add foreign key (employee_no) references employee (employee_no);

Table altered.

SQL> desc employee1;

```

Name                    Null?                Type
-----
EMPLOYEE_NAME          VARCHAR2(10)
EMPLOYEE_NO            NOT NULL             NUMBER(8)
DEPT_NAME              VARCHAR2(10)
DEPT_NO                NUMBER(5)
DATE_OF_JOIN           DATE

```

ADDING & MODIFYING CONSTRAINTS USING ALTER COMMAND

SQL> select * from employee1;

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NAME	DEPT_NO	DATE_OF_J
Raj	98	IT	22	30-SEP-06
Giri	100	CSE	67	14-NOV-81
Vishva	128	ECE	87	25-DEC-06

ADDING CONSTRAINTS TO TABLE

SQL> alter table employee1 add (salary number);

Table altered.

SQL> select * from employee1;

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NAME	DEPT_NO	DATE_OF_J	SALARY
Raj	98	IT	22	30-SEP-06	
Giri	100	CSE	67	14-NOV-81	
Vishva	128	ECE	87	25-DEC-06	

SQL> update employee1 set salary = 100 where employee_no=98;

1 row updated.

SQL> update employee1 set salary = 90 where employee_no=100;

1 row updated.

SQL> update employee1 set salary = 134 where employee_no=128;

1 row updated.

SQL> select * from employee1;

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NAME	DEPT_NO	DATE_OF_J	SALARY
Raj	98	IT	22	30-SEP-06	100
Giri	100	CSE	67	14-NOV-81	90
Vishva	128	ECE	87	25-DEC-06	134

MODIFYING THE CHARACTERISTIC OF CONSTRAINTS IN A TABLE

Note: Before modifying the character of a column, first set the column values to null. The feature of a column can be altered only if all its values become null or empty.

```
SQL> update employee1 set salary = 'where employee_no=100;
```

1 row updated.

```
SQL> update employee1 set salary = 'where employee_no=128;
```

1 row updated.

```
SQL> update employee1 set salary = 'where employee_no=98;
```

1 row updated.

```
SQL> select * from employee1;
```

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NAME	DEPT_NO	DATE_OF_J	SALARY
Raj	98	IT	22	30-SEP-06	
Giri	100	CSE	67	14-NOV-81	
Vishva	128	ECE	87	25-DEC-06	

Modifying the column of employee1 table

```
SQL> alter table employee1 modify ( salary varchar2(10));
```

Table altered.

```
SQL> select * from employee1;
```

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NAME	DEPT_NO	DATE_OF_J	SALARY
-					
Raj	98	IT	22	30-SEP-06	
Giri	100	CSE	67	14-NOV-81	
Vishva	128	ECE	87	25-DEC-06	

```
SQL> update employee1 set salary = '90' where employee_no=100;
```

1 row updated.

SQL> update employee1 set salary ='134' where employee_no=128;

1 row updated.

SQL> update employee1 set salary ='100'where employee_no=98;

1 row updated.

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NAME	DEPT_NO	DATE_OF_J	SALARY
Raj	98	IT	22	30-SEP-06	100
Giri	100	CSE	67	14-NOV-81	90
Vishva	128	ECE	87	25-DEC-06	134

Note: Differences (salary varchar2(10)) & (salary number)

(Salary varchar2(10))

SALARY

100

90

134

(salary number)

SALARY

100

90

134

ASSIGNING COMMENTS FOR TABLE

SQL> comment on table employee1 is 'EMPLOYEE DETAILS';

Comment created.

SQL> select comments from user_tab_comments;

COMMENTS

EMPLOYEE DETAILS

ASSIGNING COMMENTS FOR COLUMN

```
SQL> comment on column employee1.EMPLOYEE_NO is 'EMPLOYEE
REGISTRATION NUMBER';
```

Comment created.

```
SQL> select comments from USER_COL_COMMENTS;
```

COMMENTS

EMPLOYEE REGISTRATION NUMBER

3 rows selected.

DELETION OF TABLE VALUES

```
SQL> select * from employee1;
```

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NAME	DEPT_NO	DATE_OF_J
Vijay	345	CSE	21	21-JUN-06
Raj	98	IT	22	30-SEP-06
Giri	100	CSE	67	14-NOV-81
Vishva	128	ECE	87	25-DEC-06
Ravi	124	ECE	89	15-JUN-05

```
SQL> delete from employee1 where employee_no >344;
```

1 row deleted.

```
SQL> select * from employee1;
```

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NAME	DEPT_NO	DATE_OF_J
Raj	98	IT	22	30-SEP-06
Giri	100	CSE	67	14-NOV-81
Vishva	128	ECE	87	25-DEC-06
Ravi	124	ECE	89	15-JUN-05

```
SQL> delete from employee1 where employee_no =124;
```

1 row deleted.

SQL> select * from employee1;

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NAME	DEPT_NO	DATE_OF_J
Raj	98	IT	22	30-SEP-06
Giri	100	CSE	67	14-NOV-81
Vishva	128	ECE	87	25-DEC-06

GRANT COMMAND

SQL> grant insert,select,update,delete on employee1 to system;

Grant succeeded.

REVOKE COMMAND

SQL> revoke select,insert on employee1 from system;

Revoke succeeded.

RENAMING TABLE

SQL> Rename employee1 to emp;

Table renamed.

TRUNCATION OF TABLE

SQL> truncate table emp;

Table truncated.

SQL> select * from emp;

no rows selected

DROPPING OF TABLE

SQL> drop table emp;

Table dropped.

RESULT: Thus, the Special SQL commands has been verified and executed successfully.

EX:NO:2**STUDY OF SPECIAL SQL COMMANDS****AIM**

To execute and verify the Special SQL commands.

PROCEDURE

STEP 1: Start

STEP 2: Create the table with its essential attributes.

STEP 3: Insert attribute values into the table

STEP 4: Execute different Commands and extract information from the table.

STEP 5: Stop

SQL COMMANDS**1. COMMAND NAME: COMMIT**

COMMAND DESCRIPTION: **COMMIT** command is used to save the work done.

2. COMMAND NAME: SAVE POINT

COMMAND DESCRIPTION: **SAVE POINT** command is used to identify a point in a transaction in which it can be restored using Roll back command.

3. COMMAND NAME: ROLLBACK

COMMAND DESCRIPTION: **ROLLBACK** command is used to restore database to original since last commit.

4. COMMAND NAME: MAX

COMMAND DESCRIPTION: **MAX** command is used to find the maximum among the entities in a particular attribute.

5. COMMAND NAME: MIN

COMMAND DESCRIPTION: **MIN** command is used to find the minimum among the entities in a particular attribute.

6. COMMAND NAME: COUNT

COMMAND DESCRIPTION: **COUNT** command is used to count the entire entities in a particular attribute.

7. COMMAND NAME: SUM

COMMAND DESCRIPTION: **SUM** command is used to add all the entities within the attribute.

8. COMMAND NAME: UNION

COMMAND DESCRIPTION: **UNION** command is used to compile all distinct rows and display all entities in both rows.

9. COMMAND NAME: UNIONALL

COMMAND DESCRIPTION: **UNIONALL** command is used to return all entities in both rows.

10. COMMAND NAME: INTERSECT

COMMAND DESCRIPTION: **INTERSECT** command is used to display only similar entities in both rows.

11. COMMAND NAME: MINUS

COMMAND DESCRIPTION: **MINUS** command is used to display only the rows that don't match in both queries.

12. COMMAND NAME: AVG

COMMAND DESCRIPTION: **AVG** command is used to find average of entity in particular attribute.

TCL (TRANSACTION CONTROL COMMANDS)

- ❖ COMMIT
- ❖ SAVEPOINT
- ❖ ROLLBACK

SET OPERATORS

- ❖ UNION
- ❖ UNIONALL
- ❖ INTERSECT
- ❖ MINUS

ARITHMETIC OPERATORS

- ❖ MAX
- ❖ MIN
- ❖ COUNT
- ❖ AVG
- ❖ SUM

COMMANDS EXECUTION

CREATION OF TABLE

```
SQL> create table employee ( Employee_Name varchar2(10),Employee_no number
primary key, Dept_no number,Dept_name varchar2(10));
```

Table created.

```
SQL> create table employee1 ( Employee_Name varchar2(10),Employee_no number
primary key,Dept_no number,dept_name varchar2(10));
```

Table created.

DESCRIPTION OF TABLE

```
SQL> desc employee1;
```

Name	Null?	Type
EMPLOYEE_NAME		VARCHAR2(10)
EMPLOYEE_NO	NOT NULL	NUMBER
DEPT_NO		NUMBER
DEPT_NAME		VARCHAR2(10)

```
SQL> desc employee;
```

Name	Null?	Type
EMPLOYEE_NAME		VARCHAR2(10)
EMPLOYEE_NO	NOT NULL	NUMBER
DEPT_NO		NUMBER
DEPT_NAME		VARCHAR2(10)

SELECTION OF TABLE VALUES

```
SQL> select * from employee;
```

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NO	DEPT_NAME
Ganesh	234	45	CSE
Vijay	877	85	EEE
Vignesh	990	95	BME

```
SQL> select * from employee1;
```


EMPLOYEE_N	EMPLOYEE_NO	DEPT_NO	DEPT_NAME
Ganesh	234	45	CSE
Vishnu	476	55	IT
Vikram	985	75	ECE

COMMIT & ROLLBACK COMMAND

SQL> select * from employee;

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NO	DEPT_NAME
Ganesh	234	45	CSE
Vijay	877	85	EEE
Vignesh	990	95	BME

SQL> commit;
Commit complete.

SQL> delete from employee where employee_no=990;
1 row deleted.

SQL> select * from employee;

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NO	DEPT_NAME
Ganesh	234	45	CSE
Vijay	877	85	EEE

SQL> rollback;
Rollback complete.

SQL> select * from employee;

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NO	DEPT_NAME
Ganesh	234	45	CSE
Vijay	877	85	EEE
Vignesh	990	95	BME

SAVEPOINT & ROLLBACK COMMAND

SQL> select * from employee;

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NO	DEPT_NAME
------------	-------------	---------	-----------

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NO	DEPT_NAME
Ganesh	234	45	CSE
Vijay	877	85	EEE
Vignesh	990	95	BME

SQL> savepoint vijay;
Savepoint created.

SQL> update employee set dept_no=75 where employee_no=234;
1 row updated.

SQL> delete from employee where employee_no=990;
1 row deleted.

SQL> select * from employee;

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NO	DEPT_NAME
Ganesh	234	75	CSE
Vijay	877	85	EEE

SQL> roll back vijay
Rollback complete.

SQL> select * from employee;

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NO	DEPT_NAME
Ganesh	234	45	CSE
Vijay	877	85	EEE
Vignesh	990	95	BME

ARITHMETIC OPERATORS

SQL> select * from employee;

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NO	DEPT_NAME
Ganesh	234	45	CSE
Vijay	877	85	EEE
Vignesh	990	95	BME

SQL> select sum(employee_no) from employee;

SUM(EMPLOYEE_NO)

2101

SQL> select avg(employee_no) from employee;

AVG(EMPLOYEE_NO)

700.33333

SQL> select max(employee_no) from employee;

MAX(EMPLOYEE_NO)

990

SQL> select min(employee_no) from employee;

MIN(EMPLOYEE_NO)

234

SQL> select count(employee_no) from employee;

COUNT(EMPLOYEE_NO)

3

SET OPERATORS

SQL> select * from employee;

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NO	DEPT_NAME
-----	-----	-----	-----
Ganesh	234	45	CSE
Vijay	877	85	EEE
Vignesh	990	95	ECE

SQL> select * from employee1;

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NO	DEPT_NAME
-----	-----	-----	-----
Ganesh	234	45	CSE
Vishnu	476	55	IT
Vikram	985	75	ECE

SQL> SQL> select employee_no from employee union select employee_no from employee1;

EMPLOYEE_NO

234
476
877
985
990

SQL> select employee_no from employee union all select employee_no from employee1;

EMPLOYEE_NO

234
877
990
234
476
985

6 rows selected.

SQL> select employee_no from employee intersect select employee_no from employee1;

EMPLOYEE_NO

234

SQL> select employee_no from employee minus select employee_no from employee1;

EMPLOYEE_NO

877
990

RESULT: Thus, the Special SQL commands has been verified and executed successfully.

EX:NO:3

SQL COMMANDS FOR NESTED QUERIES AND JOIN QUERIES

AIM

To execute and verify the SQL commands using nested queries and Join queries.

PROCEDURE

STEP 1: Start

STEP 2: Create the table with its essential attributes.

STEP 3: Insert attribute values into the table

STEP 4: Execute different Commands and extract information from the table.

STEP 5: Stop

SQL COMMANDS

1. COMMAND NAME: **INNER JOIN**

COMMAND DESCRIPTION: **INNER JOIN** command returns the matching rows from the tables that are being joined.

2. COMMAND NAME: **LEFT OUTER JOIN**

COMMAND DESCRIPTION: **LEFT OUTER JOIN** command returns matching rows from the tables being joined and also non-matching row from the left table in the result and places null values in the attributes that come from the right side table.

3. COMMAND NAME: **RIGHT OUTER JOIN**

COMMAND DESCRIPTION: **RIGHT OUTER JOIN** command returns matching rows from the tables being joined and also non-matching row from the right table in the result and places null values in the attributes that come from the left side table.

4. COMMAND NAME: **NESTED QUERY**

COMMAND DESCRIPTION: **NESTED QUERY** command have query within another query.

COMMANDS EXECUTION

CREATION OF TABLE

```
SQL> create table employee ( Employee_Name varchar2(10),Employee_no number
primary key, Dept_no number,Dept_name varchar2(10));
```

Table created.

```
SQL> create table employee1 ( Employee_Name varchar2(10),Employee_no number
primary key,Dept_no number,dept_name varchar2(10));
```

Table created.

DESCRIPTION OF TABLE

```
SQL> desc employee;
```

Name	Null?	Type
EMPLOYEE_NAME		VARCHAR2(10)
EMPLOYEE_NO	NOT NULL	NUMBER
DEPT_NO		NUMBER
DEPT_NAME		VARCHAR2(10)

SELECTION OF TABLE VALUES

SQL> select * from employee;

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NO	DEPT_NAME
Ganesh	234	45	CSE
Vijay	877	85	EEE
Vignesh	990	95	BME

SQL> select * from employee1;

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NO	DEPT_NAME
Ganesh	234	45	CSE
Vishnu	476	55	IT
Vikram	985	75	ECE

JOIN COMMANDS

Note : Without defining foreign key ,Join commands cannot be executed

SQL> alter table employee1 add foreign key (employee_no) references employee1 (employee_no);

Table altered.

INNER JOIN

SQL> select e.employee_name,d.dept_no from employee e,employee1 d where e.employee_no=d.employee_no;

EMPLOYEE_N	DEPT_NO
Ganesh	45

LEFT OUTER JOIN

SQL> select e.dept_name,d.dept_no from employee e,employee1 d where e.employee_no (+) = d.employee_no;

DEPT_NAME	DEPT_NO
	55
	75
CSE	45

RIGHT OUTER JOIN

SQL> select e.dept_name,d.dept_no from employee e,employee1 d where e.employee_no = d.employee_no (+);

DEPT_NAME	DEPT_NO
CSE	45
EEE	
BME	

SUB-QUERY

SQL> update employee set dept_no=(select sum(employee_no)from employee)where employee_no=234;

1 row updated.

SQL> select * from employee;

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NO	DEPT_NAME
Ganesh	234	2101	CSE
Vijay	877	85	EEE
Vignesh	990	95	BME

SQL> create table sailor(sid number(4),sname char(15),rating number(4),age number(2),primary key(sid));

Table created.

SQL> desc sailor;

Name	Null?	Type
SID	NOT NULL	NUMBER(4)
SNAME		CHAR(15)
RATING		NUMBER(4)
AGE		NUMBER(2)

SQL> insert into sailor values(&sid,&sname,&rating,&age);

Enter value for sid: 11

Enter value for sname: john

Enter value for rating: 8

Enter value for age: 21

old 1: insert into sailor values(&sid,&sname,&rating,&age)

new 1: insert into sailor values(11,'john',8,21)

1 row created.

SQL> /

Enter value for sid: 12

Enter value for sname: lubber

Enter value for rating: 9

Enter value for age: 21

old 1: insert into sailor values(&sid,&sname,&rating,&age)

new 1: insert into sailor values(12,'lubber',9,21)

1 row created.

SQL> /

Enter value for sid: 13

Enter value for sname: david

Enter value for rating: 7

Enter value for age: 22

old 1: insert into sailor values(&sid,&sname,&rating,&age)

new 1: insert into sailor values(13,'david',7,22)

1 row created.

SQL> select * from sailor;

SID	SNAME	RATING	AGE
11	john	8	21
12	lubber	9	21
13	david	7	22


```
SQL> create table boat(bid number(4),bname char(15),color char(6),primary
key(bid),check(color in('red','blue','green')));
```

Table created.

```
SQL> desc boat;
```

Name	Null?	Type
BID	NOT NULL	NUMBER(4)
BNAME		CHAR(15)
COLOR		CHAR(6)

```
SQL> insert into boat values(&bid,&bname,&color);
```

Enter value for bid: 102

Enter value for bname: a2

Enter value for color: red

old 1: insert into boat values(&bid,&bname,&color')

new 1: insert into boat values(102,'a2','red')

1 row created.

```
SQL> /
```

Enter value for bid: 101

Enter value for bname: a2

Enter value for color: blue

old 1: insert into boat values(&bid,&bname,&color')

new 1: insert into boat values(101,'a2','blue')

1 row created.

```
SQL> /
```

Enter value for bid: 103

Enter value for bname: a3

Enter value for color: green

old 1: insert into boat values(&bid,&bname,&color')

new 1: insert into boat values(103,'a3','green')

1 row created.

```
SQL> select * from boat;
```

BID	BNAME	COLOR
102	a2	red
101	a2	blue
103	a3	green

```
SQL> create table reserve(sid number(4),bid number(4),day date,primary
key(sid,bid),foreign key(references sailor,foreign key(bid)references boat);
```

Table created.

```
SQL> desc reserve;
```

Name	Null?	Type
SID	NOT NULL	NUMBER(4)
BID	NOT NULL	NUMBER(4)
DAY		DATE

```
SQL> insert into reserve values(&sid,&bid,'&day');
```

Enter value for sid: 11

Enter value for bid: 101

Enter value for day: 11-aug-09

old 1: insert into reserve values(&sid,&bid,'&day')

new 1: insert into reserve values(11,101,'11-aug-09')

1 row created.

```
SQL> /
```

Enter value for sid: 12

Enter value for bid: 102

Enter value for day: 15-sep-09

old 1: insert into reserve values(&sid,&bid,'&day')

new 1: insert into reserve values(12,102,'15-sep-09')

1 row created.

```
SQL> select * from reserve;
```

SID	BID	DAY
11	101	11-AUG-09
12	102	15-SEP-09

```
SQL> desc boat;
```

Name	Null?	Type
BID	NOT NULL	NUMBER(4)
BNAME		CHAR(15)
COLOR		CHAR(6)

```
SQL> insert into boat values(&bid,'&bname','&color');
```

Enter value for bid: 102

Enter value for bname: a2
Enter value for color: red
old 1: insert into boat values(&bid,&bname','&color')
new 1: insert into boat values(102,'a2','red')

1 row created.

SQL> /
Enter value for bid: 101
Enter value for bname: a2
Enter value for color: blue
old 1: insert into boat values(&bid,&bname','&color')
new 1: insert into boat values(101,'a2','blue')

1 row created.

SQL> /
Enter value for bid: 103
Enter value for bname: a3
Enter value for color: green
old 1: insert into boat values(&bid,&bname','&color')
new 1: insert into boat values(103,'a3','green')

1 row created.

SQL> select * from boat;

BID	BNAME	COLOR
102	a2	red
101	a2	blue
103	a3	green

SQL> create table reserve(sid number(4),bid number(4),day date,primary key(sid,bid),foreign key(sid)references sailor,foreign key(bid)references boat);

Table created.

SQL> desc reserve;

Name	Null?	Type
SID	NOT NULL	NUMBER(4)
BID	NOT NULL	NUMBER(4)
DAY		DATE

```
SQL> insert into reserve values(&sid,&bid,'&day');
Enter value for sid: 11
Enter value for bid: 101
Enter value for day: 11-aug-09
old 1: insert into reserve values(&sid,&bid,'&day')
new 1: insert into reserve values(11,101,'11-aug-09')
```

1 row created.

```
SQL> /
Enter value for sid: 12
Enter value for bid: 102
Enter value for day: 15-sep-09
old 1: insert into reserve values(&sid,&bid,'&day')
new 1: insert into reserve values(12,102,'15-sep-09')
```

1 row created.

```
SQL> select * from reserve;
```

SID	BID	DAY
11	101	11-AUG-09
12	102	15-SEP-09

```
SQL> select sname from sailor where sid in(select sid from reserve where bid=103);
```

no rows selected

```
SQL> select sname from sailor where sid in(select sid from reserve where bid=102);
```

```
SNAME
-----
lubber
```

```
SQL> select sid from reserve where bid in(select bid from boat where color='red');
```

```
SID
-----
12
```

```
SQL> select color from boat where bid in(select bid from reserve where sid in(select sid
from sailore where sname='lubber'));
```

```
COLOR
```

red

RESULT: Thus, the SQL commands for Joins and Nested queries has been verified and executed successfully.

EX:NO:4

SQL COMMANDS FOR VIEWS

AIM

To execute and verify the SQL commands for Views.

PROCEDURE

STEP 1: Start

STEP 2: Create the table with its essential attributes.

STEP 3: Insert attribute values into the table.

STEP 4: Create the view from the above created table.

STEP 5: Execute different Commands and extract information from the View.

STEP 6: Stop

SQL COMMANDS

1. COMMAND NAME: **CREATE VIEW**

COMMAND DESCRIPTION: **CREATE VIEW** command is used to define a view.

2. COMMAND NAME: **INSERT IN VIEW**

COMMAND DESCRIPTION: **INSERT** command is used to insert a new row into the view.

3. COMMAND NAME: **DELETE IN VIEW**

COMMAND DESCRIPTION: **DELETE** command is used to delete a row from the view.

4. COMMAND NAME: **UPDATE OF VIEW**

COMMAND DESCRIPTION: **UPDATE** command is used to change a value in a tuple without changing all values in the tuple.

5. COMMAND NAME: **DROP OF VIEW**

COMMAND DESCRIPTION: **DROP** command is used to drop the view table

COMMANDS EXECUTION

CREATION OF TABLE

SQL> create table employee (Employee_name varchar2(10),employee_nonumber(8), dept_name varchar2(10),dept_no number (5),date_of_join date);

Table created.

TABLE DESCRIPTION

SQL> desc employee;

Name	Null?	Type
EMPLOYEE_NAME		VARCHAR2(10)
EMPLOYEE_NO		NUMBER(8)
DEPT_NAME		VARCHAR2(10)
DEPT_NO		NUMBER(5)
DATE_OF_JOIN		DATE

CREATION OF VIEW

```
SQL> create view empview as select
employee_name,employee_no,dept_name,dept_no,date_of_join from employee;
```

View created.

DESCRIPTION OF VIEW

```
SQL> desc empview;
```

Name	Null?	Type
EMPLOYEE_NAME		VARCHAR2(10)
EMPLOYEE_NO		NUMBER(8)
DEPT_NAME		VARCHAR2(10)
DEPT_NO		NUMBER(5)

```
SQL> select * from empview;
```

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NAME	DEPT_NO
Ravi	124	ECE	89
Vijay	345	CSE	21
Raj	98	IT	22
Giri	100	CSE	67

MODIFICATION

```
SQL> insert into empview values ('Sri',120,'CSE',67,'16-nov-1981');
```

1 row created.

```
SQL> select * from empview;
```

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NAME	DEPT_NO
Ravi	124	ECE	89
Vijay	345	CSE	21
Raj	98	IT	22
Giri	100	CSE	67
Sri	120	CSE	67

```
SQL> select * from employee;
```

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NAME	DEPT_NO	DATE_OF_J
Ravi	124	ECE	89	15-JUN-05
Vijay	345	CSE	21	21-JUN-06
Raj	98	IT	22	30-SEP-06
Giri	100	CSE	67	14-NOV-81
Sri	120	CSE	67	16-NOV-81

SQL> delete from empview where employee_name='Sri';

1 row deleted.

SQL> select * from empview;

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NAME	DEPT_NO
Ravi	124	ECE	89
Vijay	345	CSE	21
Raj	98	IT	22
Giri	100	CSE	67

SQL> update empkaviview set employee_name='kavi' where employee_name='ravi';

0 rows updated.

SQL> update empkaviview set employee_name='kavi' where employee_name='Ravi';

1 row updated.

SQL> select * from empkaviview;

EMPLOYEE_N	EMPLOYEE_NO	DEPT_NAME	DEPT_NO
kavi	124	ECE	89
Vijay	345	CSE	21
Raj	98	IT	22
Giri	100	CSE	67

SQL> drop view empview;

View dropped

RESULT: Thus, the 1 SQL commands for View has been verified and executed successfully.

EX:NO:5A**CURSORS****AIM**

To write a Cursor Procedure to calculate Payroll process of an Employee.

PROCEDURE

STEP 1: Start

STEP 2: Initialize the Cursor Procedure based on the table attributes to which the actual operation has to be carried out.

STEP 3: Develop the procedure with the essential operational parameters.

STEP 4: Specify the Individual operation to be each attribute.

STEP 5: Execute the Cursor procedure.

STEP 6: Stop

EXECUTION

```
SQL> create table sal(emp_no number(4) primary key,emp_name varchar2(30),designation
      varchar2(25),department varchar2(30),basic number(5),da_percent number(6,2), ma
      number(6,2),other_allowances number(6,2),deduction number(6,2));
```

Table created.

```
SQL> insert into sal values (1,'vijay','manager','Accounts',6000,45,200,250,1500.75);
```

1 row created.

```
SQL> insert into sal values (2,'vasanth','Asst.manager','Accounts',4000,45,200,200,1200);
```

1 row created.

```
SQL> insert into sal values(3,'priya','Steno','sales',2000,45,100,50,200);
```

1 row created.

```
SQL> select * from sal;
```

Emp_no	Emp_name	Designation	Department	Basic	da_percent	MA	other_allowance	Deduction
1	vijay	manager	Accounts	6000	45	200	250	1500.75
2	vasanth	Asstmanager	Accounts	4000	45	200	200	1200
3	priya	Steno	sales	2000	45	100	50	200

```
SQL> declare
```

```
  e_no number(6);
```

```
  e_name varchar2(25);
```

```
  net_salary number(8,2);
```

```
  cursor cur_salary is select emp_no,
```

```
  emp_name,basic+da_percent*basic/100+ma+other_allowances-deduction from sal;
```

```
begin
dbms_output.put_line('emp no ||' Name ||' Net salary');
dbms_output.put_line('-----');
open cur_salary;
loop
fetch cur_salary into e_no,e_name,net_salary;
exit when cur_salary%notfound;
dbms_output.put_line(rpad(e_no,10,'')||rpad(e_name,25,'')||net_salary);
end loop;
close cur_salary;
end;
/
```

OUTPUT:

emp no	Name	Net salary
1	vijay	7649.25
2	vasanth	5000
3	priya	2850

PL/SQL procedure successfully completed.

RESULT: Thus, the Cursor Procedure for calculating the Payroll process has been executed successfully.

EX:NO:5B**PROCEDURES****AIM**

To write a PL/SQL block to display the student name, marks whose average mark is above 60%.

ALGORITHM

STEP1:Start

STEP2:Create a table with table name stud_exam

STEP3:Insert the values into the table and Calculate total and average of each student

STEP4: Execute the procedure function the student who get above 60%.

STEP5: Display the total and average of student

STEP6: End

CODINGS

```
SQL> create table student(regno number(4),name varchar2(20),mark1 number(3), mark2
      number(3), mark3 number(3), mark4 number(3), mark5 number(3));
```

Table created

```
SQL> insert into student values (101,'priya', 78, 88,77,60,89);
```

1 row created.

```
SQL> insert into student values (102,'surya', 99,77,69,81,99);
```

1 row created.

```
SQL> insert into student values (103,'suryapriya', 100,90,97,89,91);
```

1 row created.

```
SQL> select * from student;
```

regno	name	mark1	mark2	mark3	mark4	mark5
101	priya	78	88	77	60	89
102	surya	99	77	69	81	99
103	suryapriya	100	90	97	89	91

```
SQL> declare
ave number(5,2);
```

```

tot number(3);
cursor c_mark is select*from student where mark1>=40 and mark2>=40 and
mark3>=40 and mark4>=40 and mark5>=40;
begin
dbms_output.put_line('regno name mark1 mark2 mark3 mark4 mark5 total average');
dbms_output.put_line('-----');
for student in c_mark
loop
tot:=student.mark1+student.mark2+student.mark3+student.mark4+student.mark5;
ave:=tot/5;
dbms_output.put_line(student.regno||rpad(student.name,15)
||rpad(student.mark1,6)||rpad(student.mark2,6)||rpad(student.mark3,6)
||rpad(student.mark4,6)||rpad(student.mark5,6)||rpad(tot,8)||rpad(ave,5));
end loop;
end;
/

```

SAMPLE OUTPUT

regno	name	mark1	mark2	mark3	mark4	mark5	total	average
101	priya	78	88	77	60	89	393	79
102	surya	99	77	69	81	99	425	85
103	suryapriya	100	90	97	89	91	467	93

PL/SQL procedure successfully completed.

RESULT:

Thus, the PL/SQL block to display the student name,marks,average is verified and executed.

EX:NO:5C FUNCTIONS

AIM

To write a Functional procedure to search an address from the given database.

PROCEDURE

STEP 1: Start

STEP 2: Create the table with essential attributes.

STEP 3: Initialize the Function to carryout the searching procedure..

STEP 4: Frame the searching procedure for both positive and negative searching.

STEP 5: Execute the Function for both positive and negative result .

STEP 6: Stop

EXECUTION

```
SQL> create table phonebook(phone_no number(6) primary key,username varchar2(30),doorno  
varchar2(10),street varchar2(30),place varchar2(30),pincode char(6));
```

Table created.

```
SQL> insert into phonebook values(20312,'vijay','120/5D','bharathi street','NGO  
colony','629002');
```

1 row created.

```
SQL> insert into phonebook values(29467,'vasanth','39D4','RK bhavan','sarakkal vilai','629002');
```

1 row created.

```
SQL> select * from phonebook;
```

<u>PHONE_NO</u>	<u>USERNAME</u>	<u>DOORNO</u>	<u>STREET</u>	<u>PLACE</u>	<u>PINCODE</u>
20312	vijay	120/5D	bharathi street	NGO colony	629002
29467	vasanth	39D4	RK bhavan	sarakkal vilai	629002

```
SQL> create or replace function findAddress(phone in number) return varchar2 as  
address varchar2(100);  
begin  
select username||','||doorno ||','||street ||','||place||','||pincode into address from phonebook  
where phone_no=phone;  
return address;  
exception  
when no_data_found then return 'address not found';  
end;  
/
```

Function created.

```
SQL>declare
  2 address varchar2(100);
  3 begin
  4 address:=findaddress(20312);
  5 dbms_output.put_line(address);
  6 end;
  7 /
```

OUTPUT 1:
vijay,120/5D,bharathi street,NGO colony,629002

PL/SQL procedure successfully completed.

```
SQL> declare
  2 address varchar2(100);
  3 begin
  4 address:=findaddress(23556);
  5 dbms_output.put_line(address);
  6 end;
  7 /
```

OUTPUT2:
address not found

PL/SQL procedure successfully completed.

RESULT: Thus, the Function for searching process has been executed successfully.

EX: NO: 5 D

CONTROLS

AIM

To write a PL/SQL block using different control (if else, for loop, while loop,...) statements.

PROCEDURE

STEP 1: Start

STEP 2: Initialize the necessary parameters.

STEP 3: Develop the set of statements with the essential operational parameters.

STEP 4: Specify the Individual operation to be carried out.

STEP 5: Execute the statements.

STEP 6: Stop.

*****ADDITION OF TWO NUMBERS*****

```

SQL> declare
a number;
b number;
c number;
begin
a:=&a;
b:=&b;
c:=a+b;
dbms_output.put_line('sum of'||a||'and'||b||'is'||c);
end;
/

```

INPUT:

```

Enter value for a: 23
old 6: a:=&a;
new 6: a:=23;
Enter value for b: 12
old 7: b:=&b;
new 7: b:=12;

```

OUTPUT:

sum of23and12is35

PL/SQL procedure successfully completed.

*****GREATEST OF THREE NUMBERS USING IF ELSE*****

```

SQL> declare
a number;
b number;
c number;
d number;
begin
a:=&a;
b:=&b;

```

```
c:=&b;
if(a>b)and(a>c) then
dbms_output.put_line('A is maximum');
  elsif(b>a)and(b>c)then
dbms_output.put_line('B is maximum');
else
dbms_output.put_line('C is maximum');
end if;
end;
/
```

INPUT:

```
Enter value for a: 21
old 7: a:=&a;
new 7: a:=21;
Enter value for b: 12
old 8: b:=&b;
new 8: b:=12;
Enter value for b: 45
old 9: c:=&b;
new 9: c:=45;
```

OUTPUT:

C is maximum

PL/SQL procedure successfully completed.

*****SUMMATION OF ODD NUMBERS USING FOR LOOP*****

```
SQL> declare
n number;
sum1 number default 0;
endvalue number;
begin
endvalue:=&endvalue;
  n:=1;
  for n in 1..endvalue
  loop
    if mod(n,2)=1
    then
    sum1:=sum1+n;
    end if;
  end loop;
  dbms_output.put_line('sum ='||sum1);
end;
/
```

INPUT:

```
Enter value for endvalue: 4
old 6: endvalue:=&endvalue;
new 6: endvalue:=4;
```

OUTPUT:

```
sum =4
```

PL/SQL procedure successfully completed.

*****SUMMATION OF ODD NUMBERS USING WHILE LOOP*****

```
SQL> declare
n number;
sum1 number default 0;
endvalue number;
begin
endvalue:=&endvalue;
n:=1;
while(n<endvalue)
loop
sum1:=sum1+n;
n:=n+2;
end loop;
dbms_output.put_line('sum of odd no. bt 1 and' ||endvalue||'is'||sum1);
end;
/
```

INPUT:

```
Enter value for endvalue: 4
old 6: endvalue:=&endvalue;
new 6: endvalue:=4;
```

OUTPUT:

```
sum of odd no. bt 1 and4is4
```

PL/SQL procedure successfully completed.

RESULT:

Thus, the PL/SQL block for different controls are verified and executed.

EX:NO:6**FRONT END TOOLS****AIM**

To design a form using different tools in Visual Basic.

PROCEDURE

STEP 1: Start

STEP 2: Create the form with essential controls in tool box.

STEP 3: Write the code for doing the appropriate functions.

STEP 4: Save the forms and project.

STEP 5: Execute the form .

STEP 6: Stop

EXECUTION**Form1**

```
Private Sub Command1_Click()  
List1.AddItem Text1.Text  
List1.AddItem Text2.Text  
If Option1.Value = True Then  
gender = "male"  
End If  
If Option2.Value = True Then  
gender = "female"  
End If  
List1.AddItem gender  
List1.AddItem Text3.Text  
If Check1.Value = 1 And Check2.Value = 0 Then  
area = "software Engineering"  
End If  
If Check1.Value = 1 And Check2.Value = 1 Then  
area = "software Engineering & Networks"  
End If  
If Check1.Value = 0 And Check2.Value = 1 Then  
area = " Networks"  
End If  
List1.AddItem area  
List1.AddItem Text4.Text  
End Sub  
  
Private Sub Command2_Click()  
If List1.ListIndex <> 0 Then  
List1.RemoveItem (0)  
End If  
End Sub  
  
Private Sub Command3_Click()
```

End

End Sub

Sample Snapshot:

The image shows a graphical user interface for a resume form. The title "RESUME" is displayed in a stylized, italicized font at the top right. The form consists of several labeled input fields and a large empty rectangular box. At the bottom, there are three buttons: "Submit", "Clear", and "Exit".

RESUME

Name

DOB

Gender Male
 Female

Qualification

Area of interest Software Engineering
 Networks

Address

RESUME

Name

Arunsarwan

DOB

12.06.1977

Gender

Male

Female

Qualification

B.E

Area of
interest

Software Engineering

Networks

Address

Villupuram

Arunsarwan
12.06.1977
male
B.E
software Engineering
Villupuram

Submit

Clear

Exit

RESUME

Name

DOB

Gender Male
 Female

Qualification

Area of interest Software Engineering
 Networks

Address

B.E
software Engineering
Villupuram

RESULT: Thus, the program has been loaded and executed successfully.

EX:NO:7

FORM DESIGN

AIM

To design a form using Visual Basic.

PROCEDURE

STEP 1: Start

STEP 2: Create the form with essential controls in tool box.

STEP 3: Write the code for doing the appropriate functions.

STEP 4: Save the forms and project.

STEP 5: Execute the form.

STEP 6: Stop

EXECUTION

Form1

```
Private Sub Command1_Click()  
Dim a As Integer  
a = Val(Text1.Text) + Val(Text2.Text)  
MsgBox ("Addition of Two numbers is" + Str(a))  
End Sub
```

```
Private Sub Command2_Click()  
Dim b As Integer  
b = Val(Text1.Text) - Val(Text2.Text)  
MsgBox ("Subraction of Two numbers is" + Str(b))  
End Sub
```

```
Private Sub Command3_Click()  
Dim c As Integer  
c = Val(Text1.Text) * Val(Text2.Text)  
MsgBox ("Multiplication of Two numbers is" + Str(c))  
End Sub
```

```
Private Sub Command4_Click()  
Dim d As Integer  
d = Val(Text1.Text) / Val(Text2.Text)  
MsgBox ("Division of Two numbers is" + Str(d))  
End Sub
```

```
Private Sub Command5_Click()  
End  
End Sub
```

Sample Snapshot:

Enter No 1

Enter No 2

Add Sub Mul Div

Exit

This image shows the initial state of a calculator application. It features a light beige background. At the top, there are two input fields labeled "Enter No 1" and "Enter No 2", both of which are currently empty. Below these fields, there are four buttons labeled "Add", "Sub", "Mul", and "Div" arranged horizontally. At the bottom center, there is a single button labeled "Exit".

Enter No 1

Enter No 2

Add Sub Mul Div

Exit

This image shows the calculator application after some user input. The "Enter No 1" field now contains the number "54" and the "Enter No 2" field contains the number "12". The "Add" button is highlighted with a dashed border, indicating it is the selected operation. The other buttons ("Sub", "Mul", "Div", "Exit") remain in their original state.

Enter No 1

Enter No 2

Addition of Two numbers is 66

RESULT: Thus, the program has been loaded and executed successfully.

EX:NO:8

TRIGGER

AIM

To develop and execute a Trigger for Before and After update, delete, insert operations on a table.

PROCEDURE

STEP 1: Start

STEP 2: Initialize the trigger with specific table id.

STEP 3:Specify the operations (update, delete, insert) for which the trigger has to be executed.

STEP 4: Execute the Trigger procedure for both Before and After sequences

STEP 5: Carryout the operation on the table to check for Trigger execution.

STEP 6: Stop

EXECUTION

SQL> create table emp(id number(3),name varchar2(10),income number(4),expence number(3),savings number(3));

Table created.

SQL> insert into emp values(2,'kumar',2500,150,650);
1 row created.

SQL> insert into emp values(3,'venky',5000,900,950);

1 row created.

SQL> insert into emp values(4,'anish',9999,999,999);

1 row created.

SQL> select * from emp;

ID	NAME	INCOME	EXPENCE	SAVINGS
2	kumar	2500	150	650
3	venky	5000	900	950
4	anish	9999	999	999

TYPE 1- TRIGGER AFTER UPDATE

```

SQL> CREATE OR REPLACE TRIGGER VIJAY
  AFTER UPDATE OR INSERT OR DELETE ON EMPA
  FOR EACH ROW
  BEGIN
  IF UPDATING THEN

```

```

    DBMS_OUTPUT.PUT_LINE('TABLE IS UPDATED');
    ELSIF INSERTING THEN
    DBMS_OUTPUT.PUT_LINE('TABLE IS INSERTED');
    ELSIF DELETING THEN
    DBMS_OUTPUT.PUT_LINE('TABLE IS DELETED');
    END IF;
    END;
/

```

Trigger created.

```

SQL> update emp set income =900 where name='kumar';
TABLE IS UPDATED
1 row updated.

```

```

SQL> insert into emp values ( 4,'Chandru',700,250,80);
TABLE IS INSERTED
1 row created.

```

```

SQL> DELETE FROM EMPA WHERE ID = 4;
TABLE IS DELETED
1 row deleted.

```

```

SQL> select * from emp;

```

EMPID	EMPNAME	INCOME	EXPENSE	SAVINGS
2	vivek	830	150	100
3	kumar	5000	550	50
9	vasanth	987	6554	644

TYPE 2 - TRIGGER BEFORE UPDATE

```

SQL> CREATE OR REPLACE TRIGGER VASANTH
    BEFORE UPDATE OR INSERT OR DELETE ON EMPLOYEE
    FOR EACH ROW
    BEGIN
    IF UPDATING THEN
    DBMS_OUTPUT.PUT_LINE('TABLE IS UPDATED');
    ELSIF INSERTING THEN
    DBMS_OUTPUT.PUT_LINE('TABLE IS INSERTED');
    ELSIF DELETING THEN
    DBMS_OUTPUT.PUT_LINE('TABLE IS DELETED');
    END IF;
    END;
/

```

Trigger created.

```
SQL> INSERT INTO EMP VALUES (4,'SANKAR',700,98,564);
```

TABLE IS INSERTED

1 row created.

```
SQL> UPDATE EMP SET EMPID = 5 WHERE EMPNAME = 'SANKAR';
```

TABLE IS UPDATED

1 row updated.

```
SQL> DELETE EMP WHERE EMPNAME='SANKAR';
```

TABLE IS DELETED

1 row deleted.

RESULT: Thus, the Trigger procedure has been executed successfully for both before and after sequences.

REFERENCES

- 1.Database Management Systems solutions manual, Raghu Ramakrishnan, Johannes Gehrke, Jeff Derstadt, Scott Selikoff and Lin Zhu, third Edition, 2013
- 2.SQL with Guru99 by Krishna Rungta,Smashwords 2013
- 3.A Primer on SQL by Rahul Batra, dreamincode.net 2012
- 4.Learn SQL The Hard Way by Zed A. Shaw, LCodeTHW 2011
- 5.Developing Time-Oriented Database Applications in SQL, by Richard T. Snodgrass, Morgan Kaufmann 1999

ABOUT AUTHORS

John T Mesia Dhas received his Ph.D. in Computer Science and Engineering from Vel Tech University, Chennai, India. He has 16 years of Experience in the field of Education and Industry, currently he is working as an Associate Professor with Computer Science and Engineering Department of Audisankara College of Engineering and Technology, Gudur, Andhra Pradesh, India under Jawaharlal Nehru Technological University Anantapuramu.

He is also doing researches in Software Engineering and Data Analytics fields. He has published more than 22 research papers in conferences and Journals.

T. S. Shiny Angel received her Ph.D. in Computer Science and Engineering from SRM University, Chennai, India. She has 19 years of Experience in the field of Education and Industry, currently she is working as an Assistant Professor Sr. Grade with Software Engineering Department of SRM Institute of Science and Technology (formerly known as SRM University), Chennai, Tamil Nadu, India.

She is also doing researches in Software Engineering, Machine Learning and Data Analytics fields. She has published more than 45 research papers in conferences and Journals.

ISBN: 978-93-5437-572-9

Price: ₹. 250/-

OTHER BOOKS

S. No	Title	ISBN
1	C LOGIC PROGRAMMING	978-93-5416-366-1
2	Modern Metrics (MM): The Functional Size Estimator for Modern Software	978-93-5408-510-9
3	PYTHON 3.7.1 Vol - I	978-93-5416-045-5
4	SOFTWARE SIZING APPROACHES	978-93-5437-820-1
5	DBMS PRACTICAL PROGRAMS	978-93-5437-572-9
6	SERVICE ORIENTED ARCHITECTURE	978-93-5416-496-5

For free E-Books: jtmdhasres@gmail.com

ISBN: 978-93-5437-572-9

Price: ₹. 250/-